








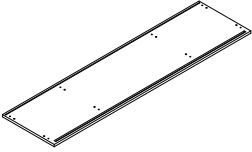
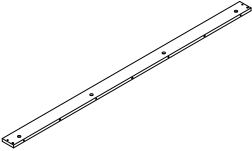







ASSEMBLY INSTRUCTIONS

Part List:




















ITEM	DESCRIPTION	PART	QTY
1	Pulley track		1
2	Upper fixing board		1
3	Right middle vertical board		1
4	Left middle vertical board		1
5	Middle shelf		1
6	Left/Right shelf		2
7	Right door		1
8	Right side board		1

Part List:

ITEM	DESCRIPTION	PART	QTY
9	Left side board		1
10	Bottom board		1
11	Bottom front covering		1
12	Bottom left side covering		1
13	Bottom right side covering		1
14	Back board		1
15	Top board		1
16	Left door		1

ASSEMBLY INSTRUCTIONS

Hardware List:

ITEM	DESCRIPTION	PART	QTY
A	7*39mm Cam bolt		30
B	Cam lock		22
C	8*30mm Dowel		28
D	3.5*14mm Screw		8
E	5*40mm Screw		12
F	4*14mm Screw		16
G	6*30mm Bolt		4
H	Back buckle with screw		12
I	Adjustable foot		2
J	Allen key		1
K	Foot nail		6
L	Handle		2
M	Screw and plastic cap		4
N	Angle iron		2
O	6*50mm Dowel		4
P	Wall fixing pack		2
Q	Pulley		4
R	6*30mm Dowel		4
S	Cam lock		8


Using Camlocks

Step 1

Connect the male camlock as directed in the assembly instructions using a screwdriver.

1


DO NOT OVER TIGHTEN.
NE PAS SERRER EXCESSIVEMENT.



Step 2

Push the male camlock into the entry hole.

2

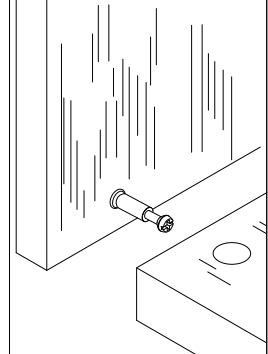


Step 3

Insert the female camlock as shown in the instructions.

Note: ensure that the arrow on the top of the camlock points towards the entry hole for the male camlock.

3

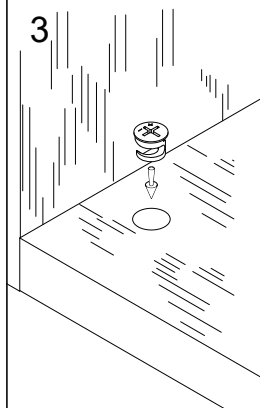


Step 4

Turn the female camlock clockwise with a screwdriver.




You should feel a click when the camlock is locked in place.

The joint is now secure.

4

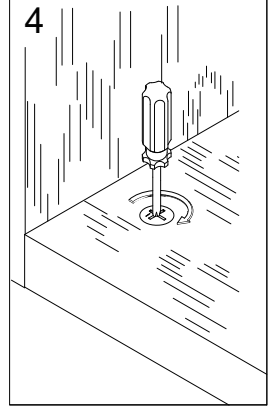






1

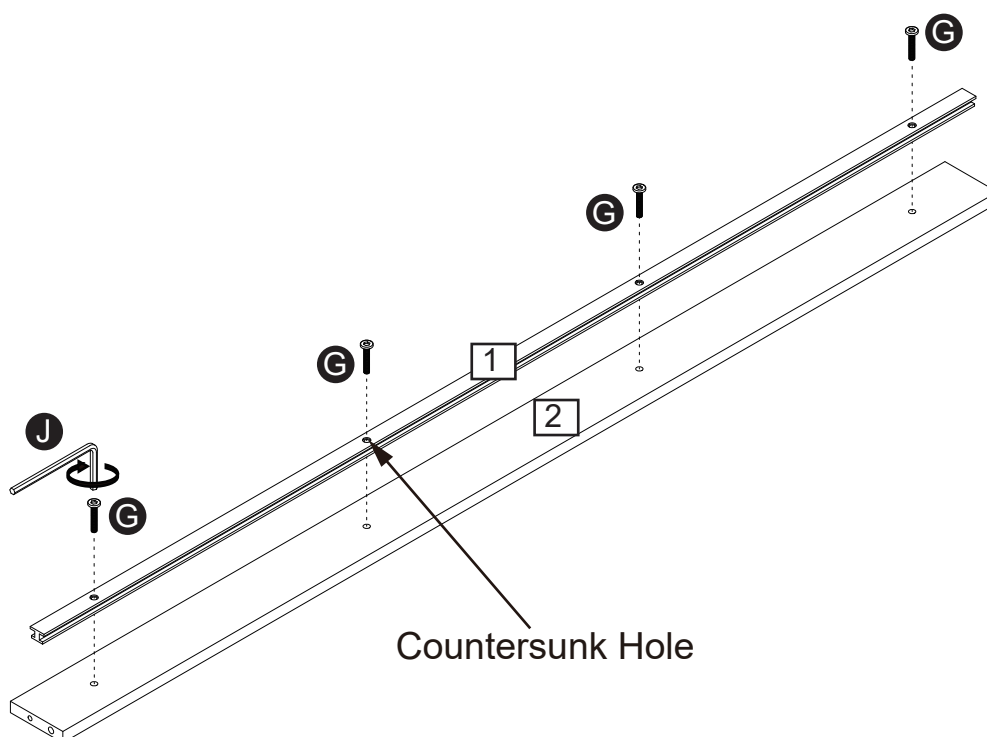




2

CAM-LOCK




Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

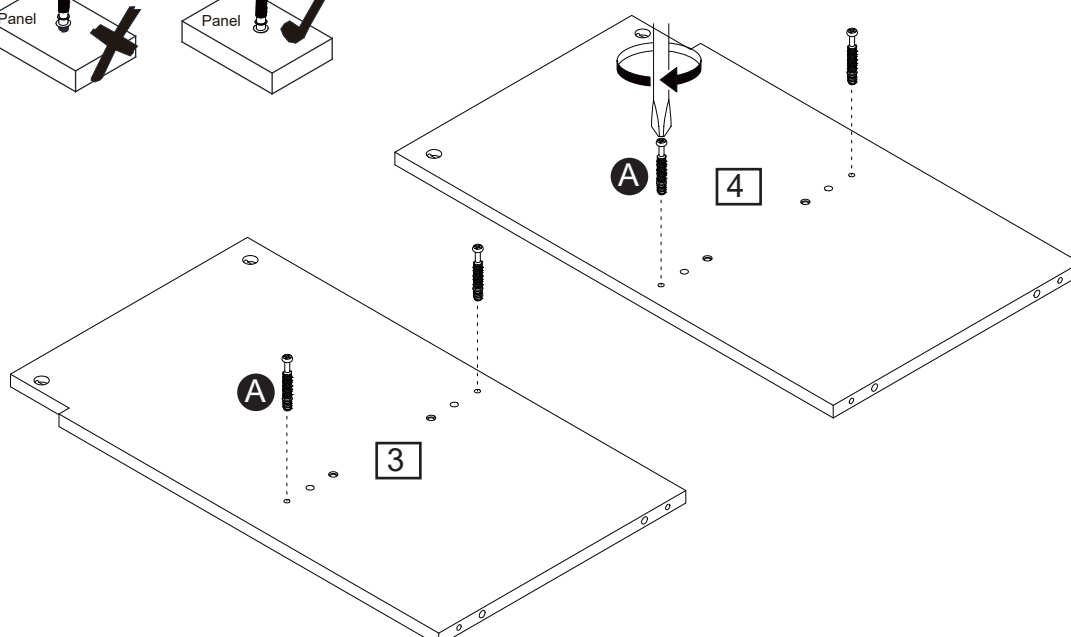

3

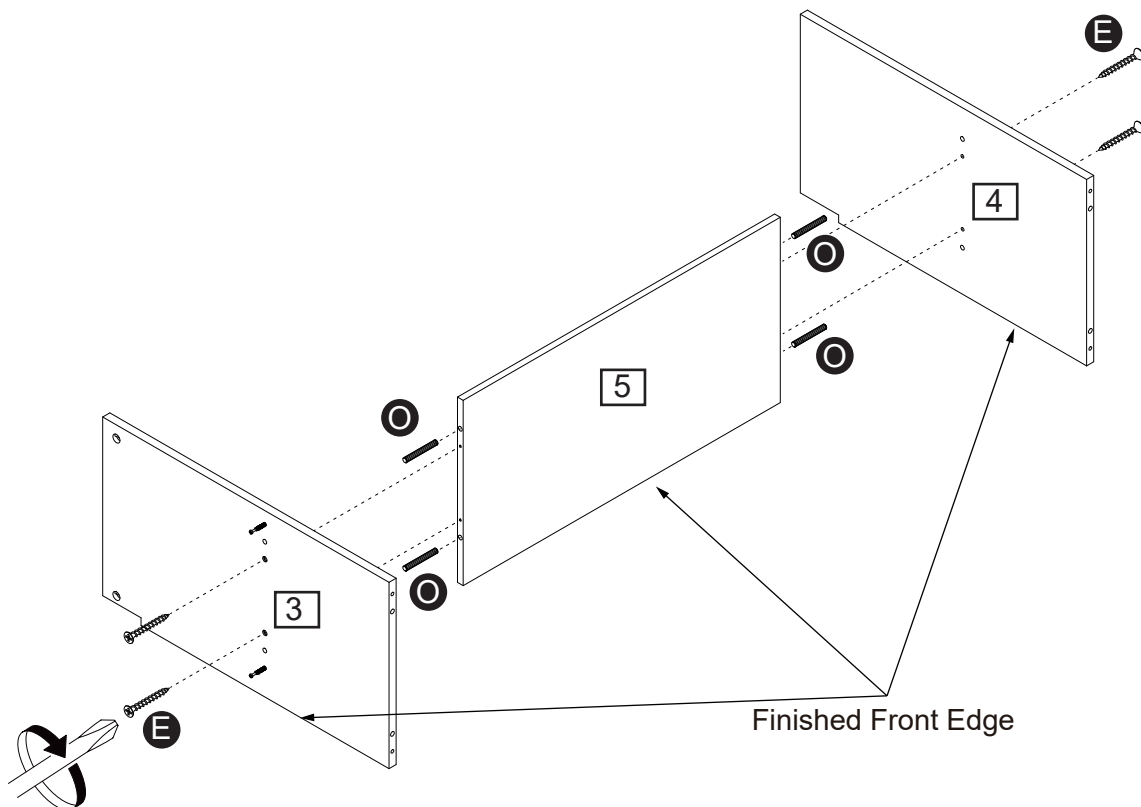





4

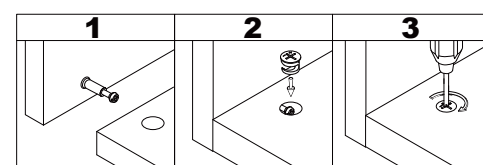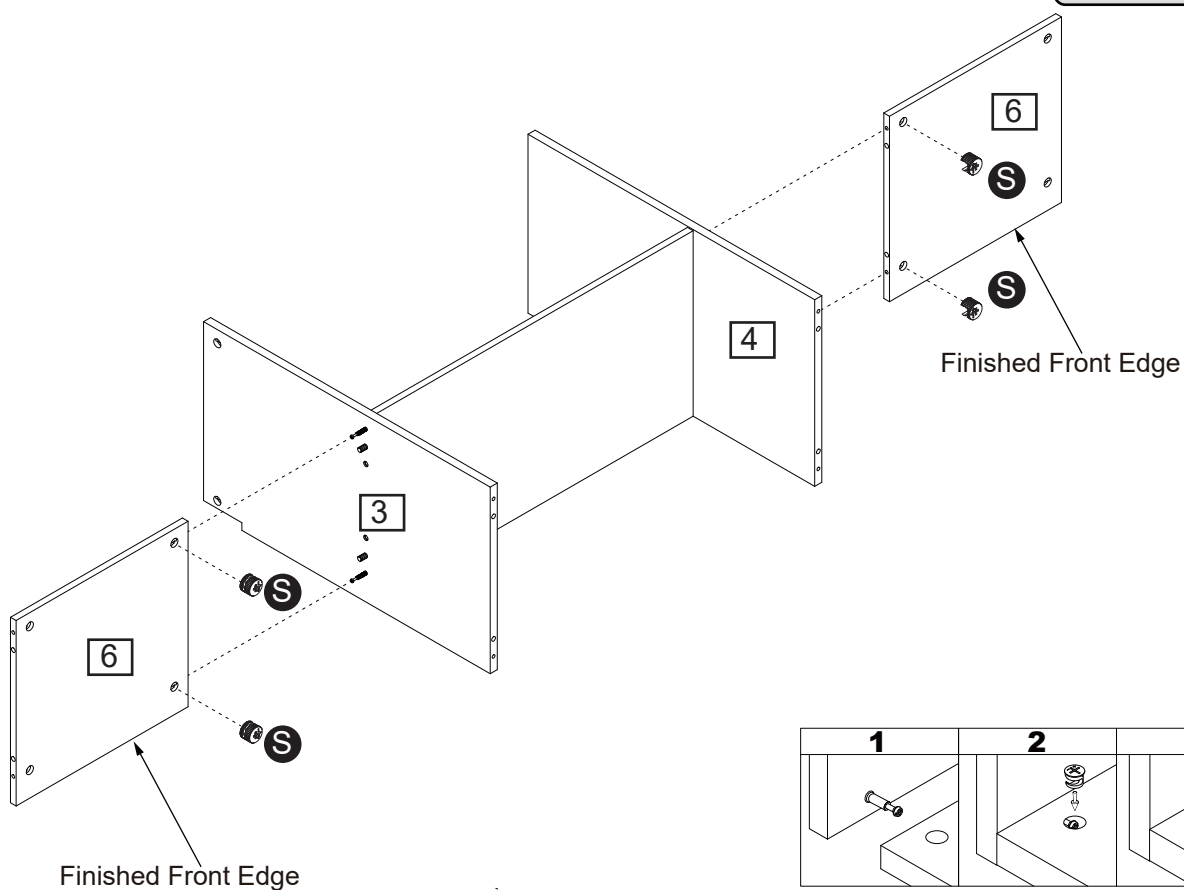






5

CAM-LOCK





Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

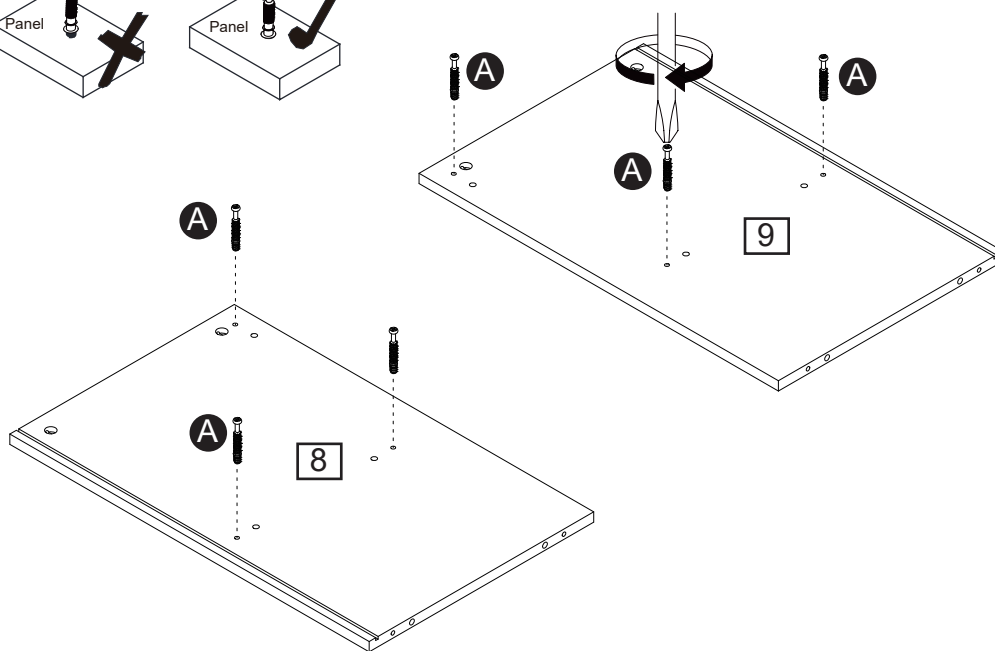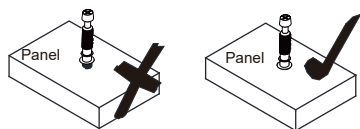


6

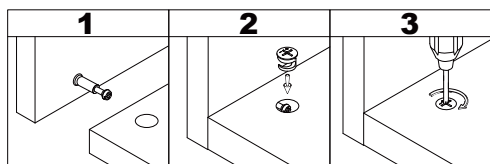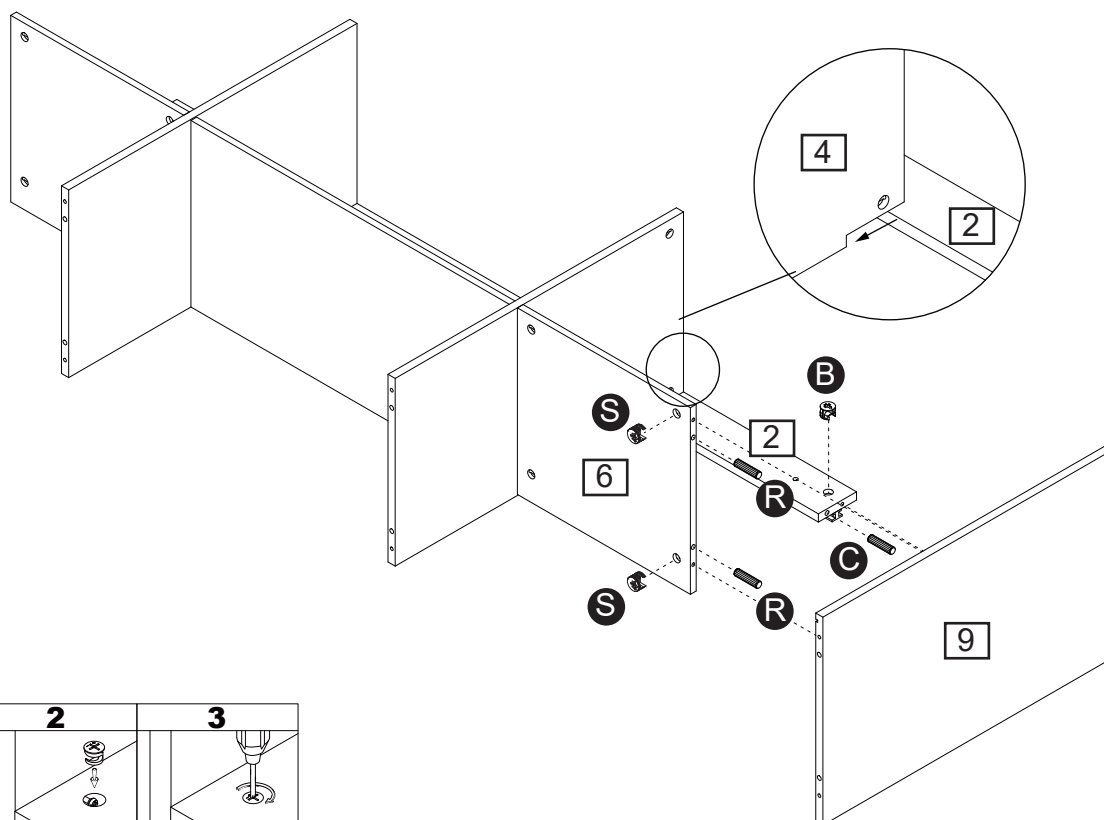

7

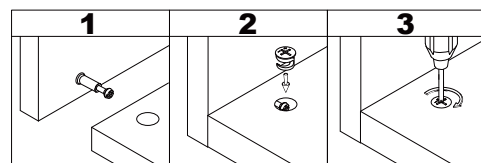
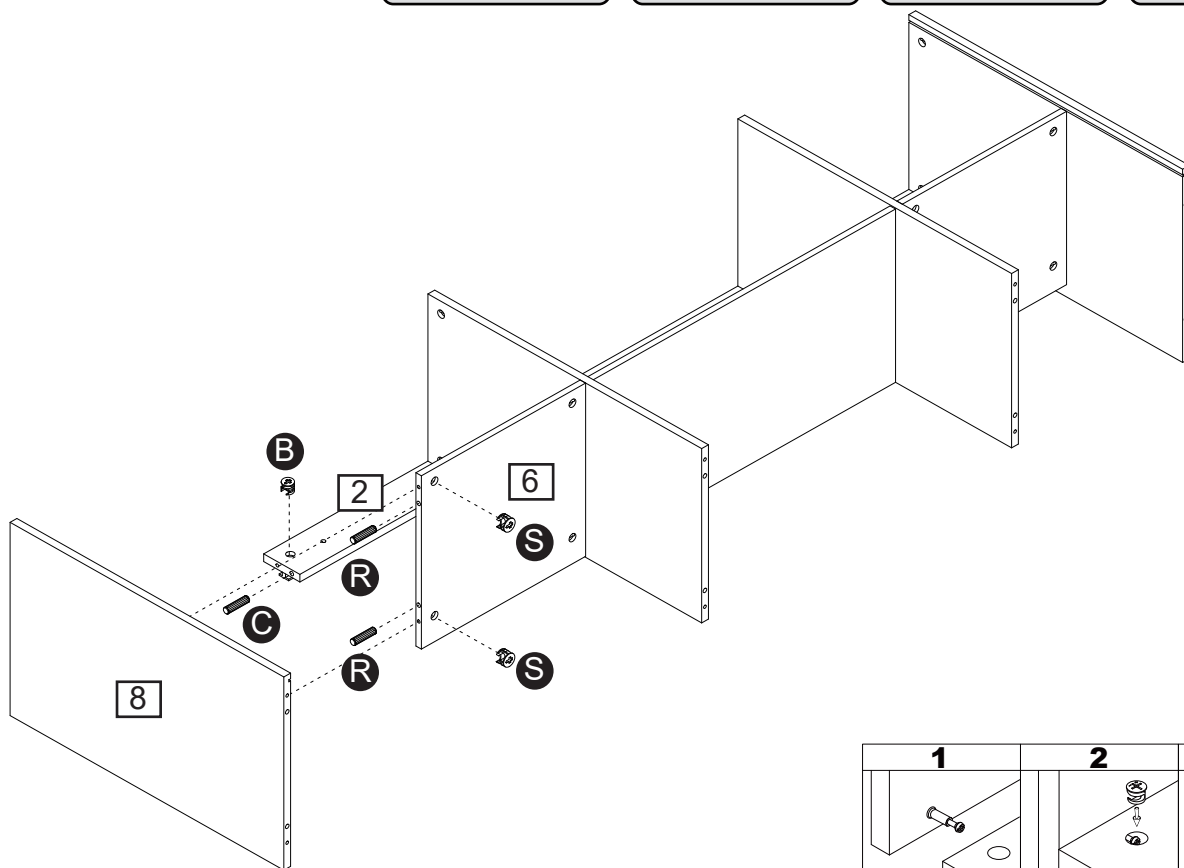




8




CAM-LOCK

Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

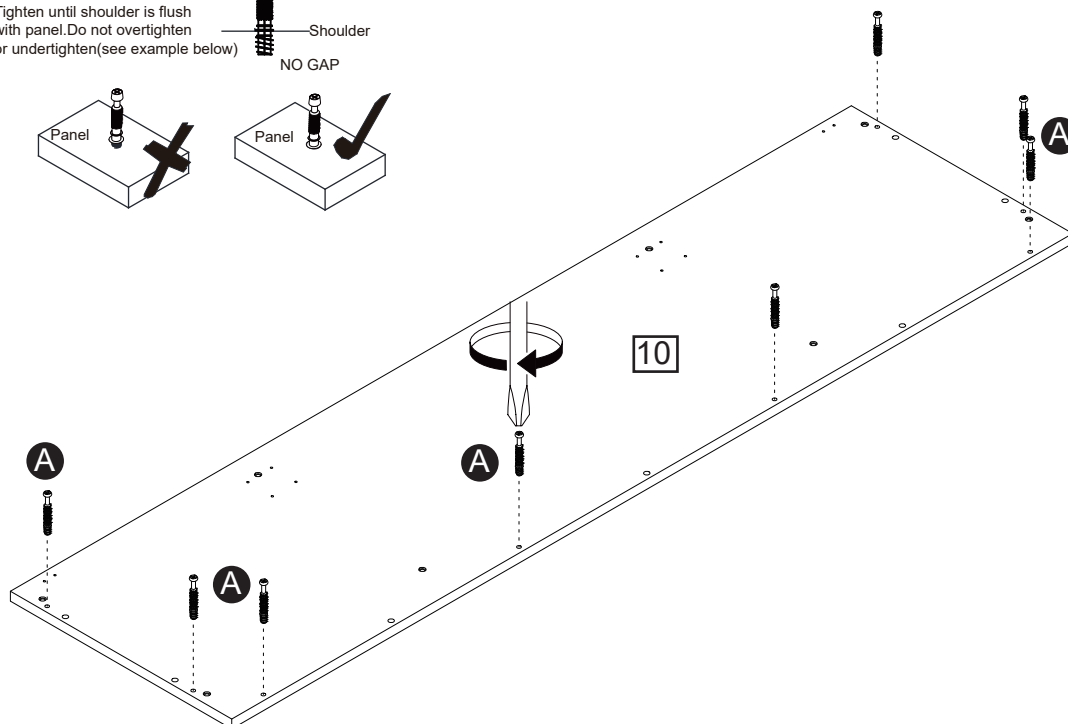






9

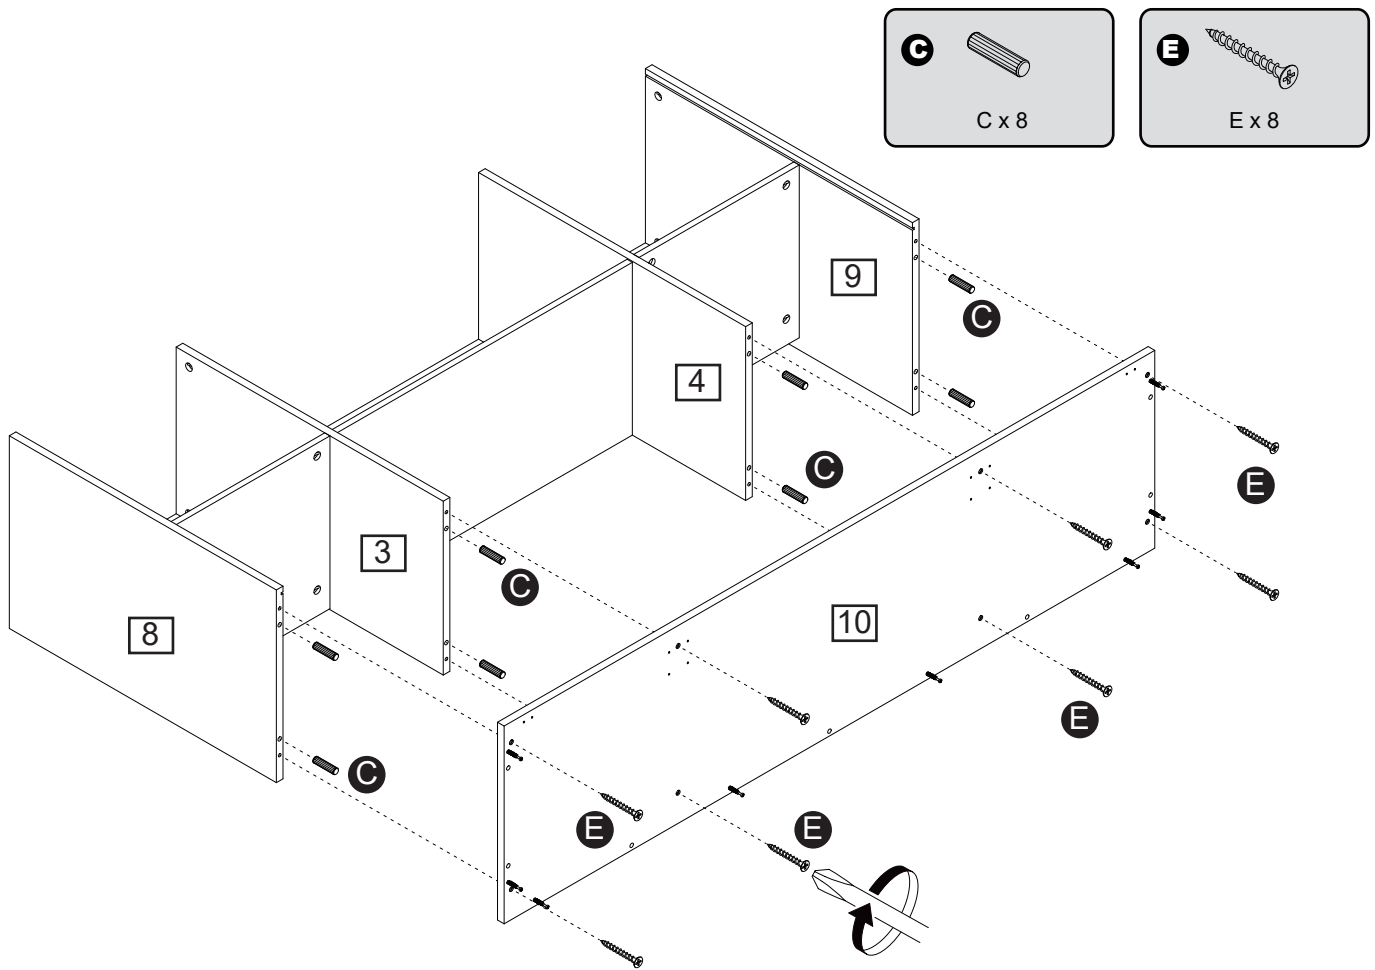



10

CAM-LOCK




Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

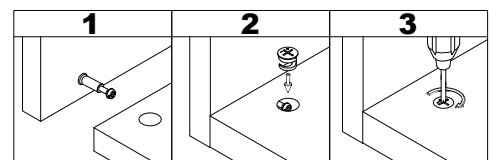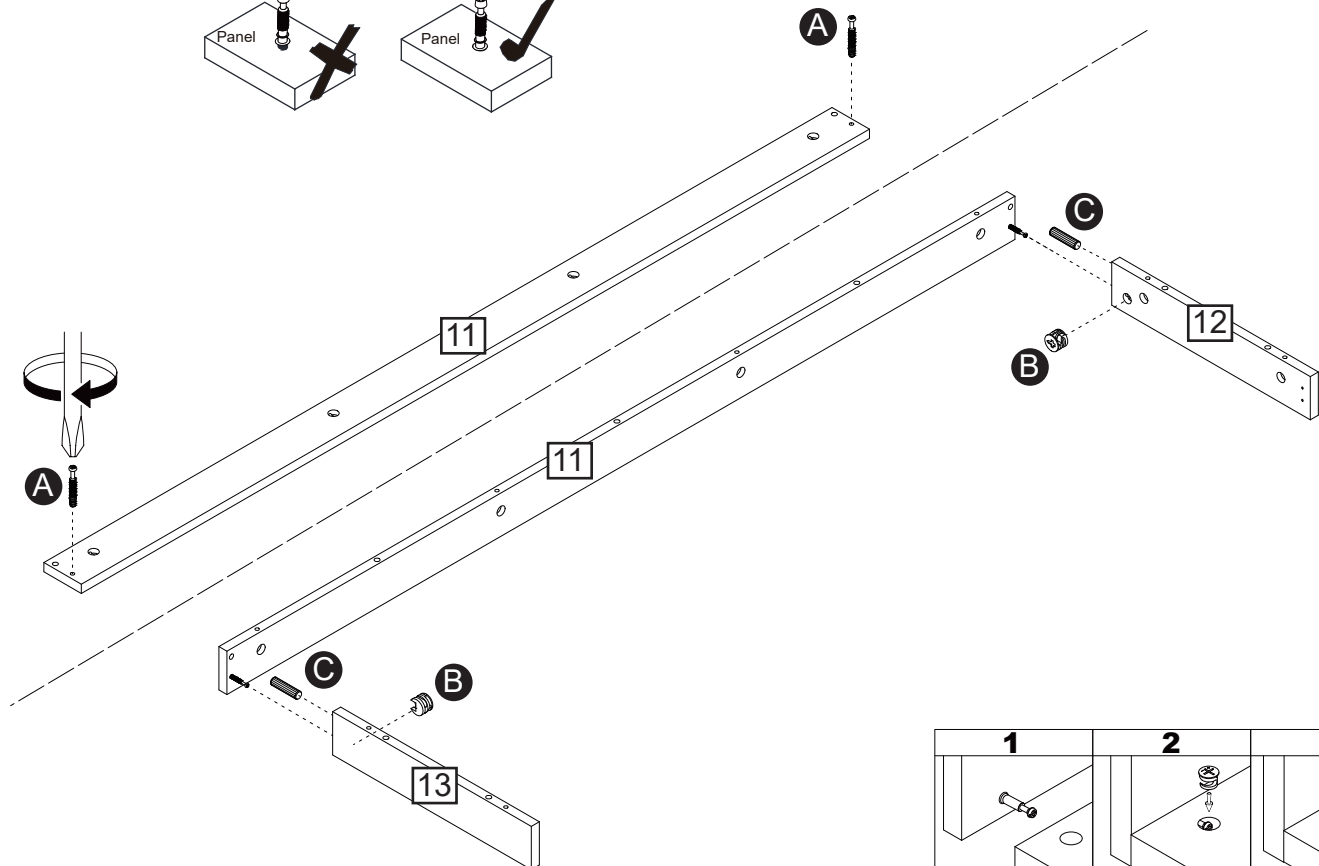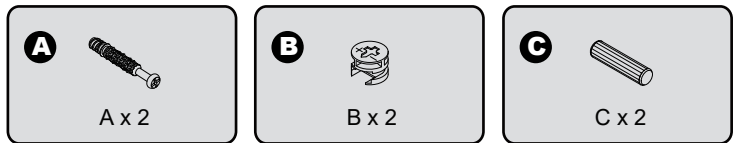



11

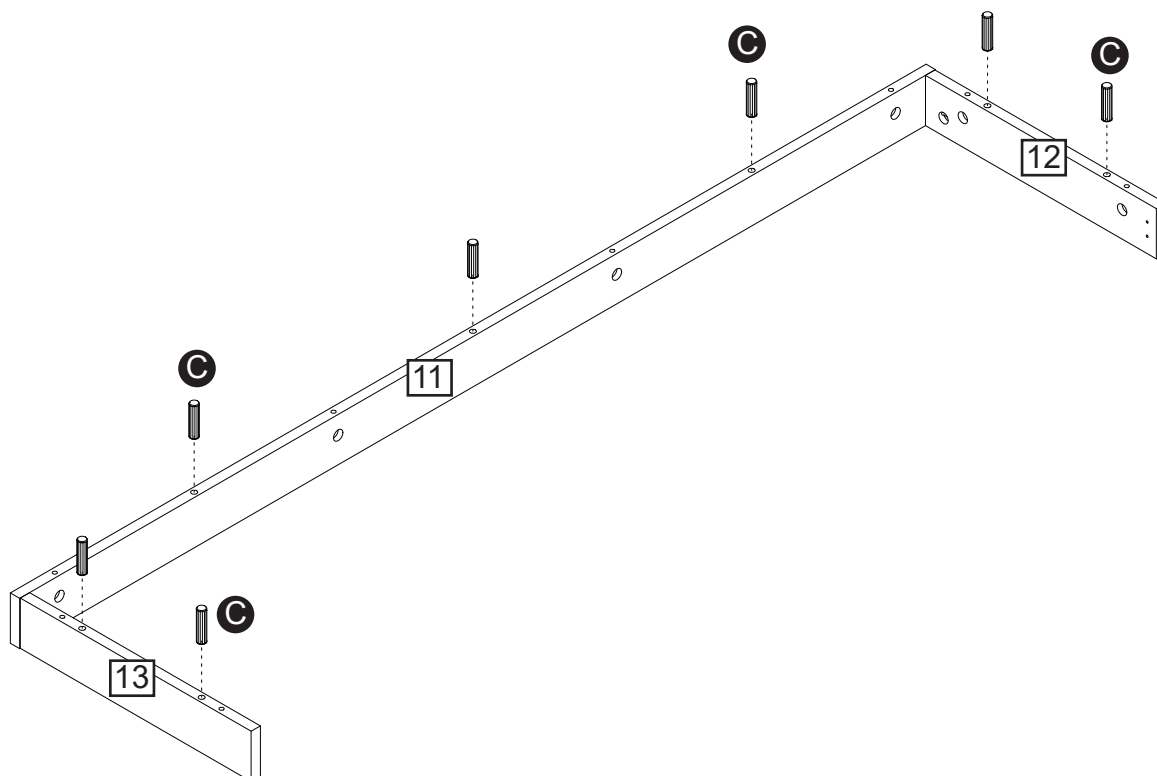






12

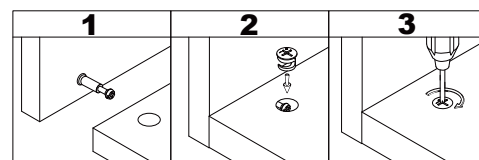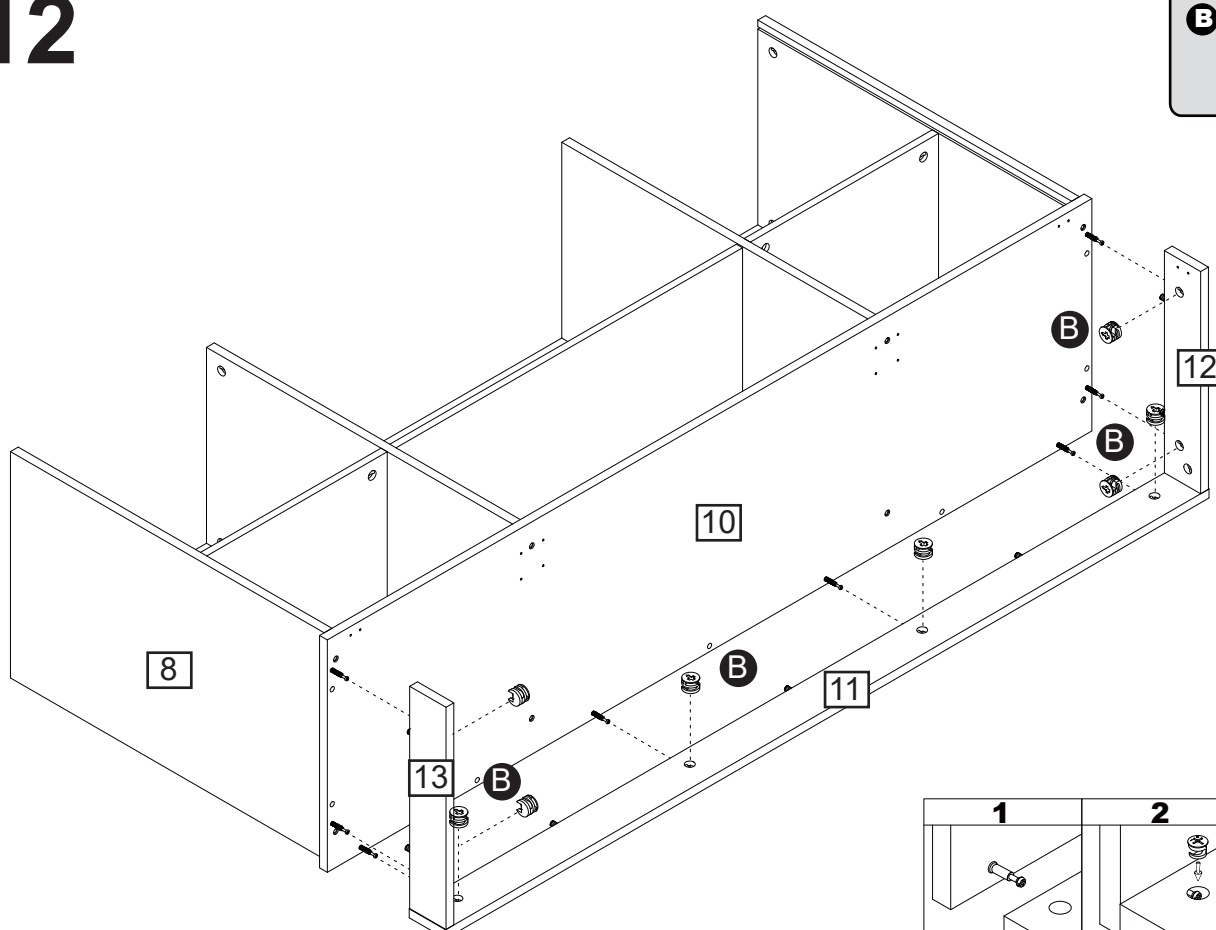


13

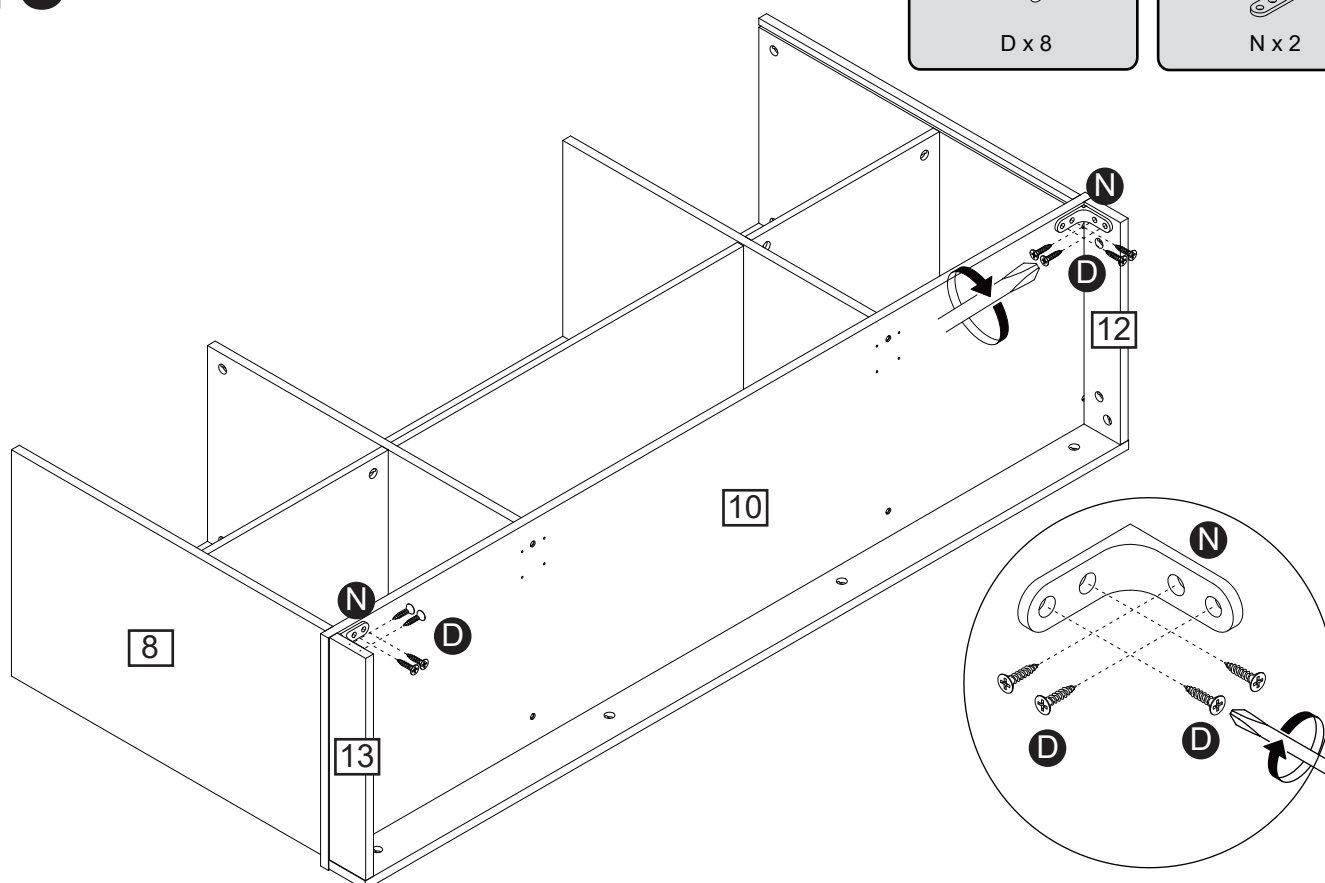


14

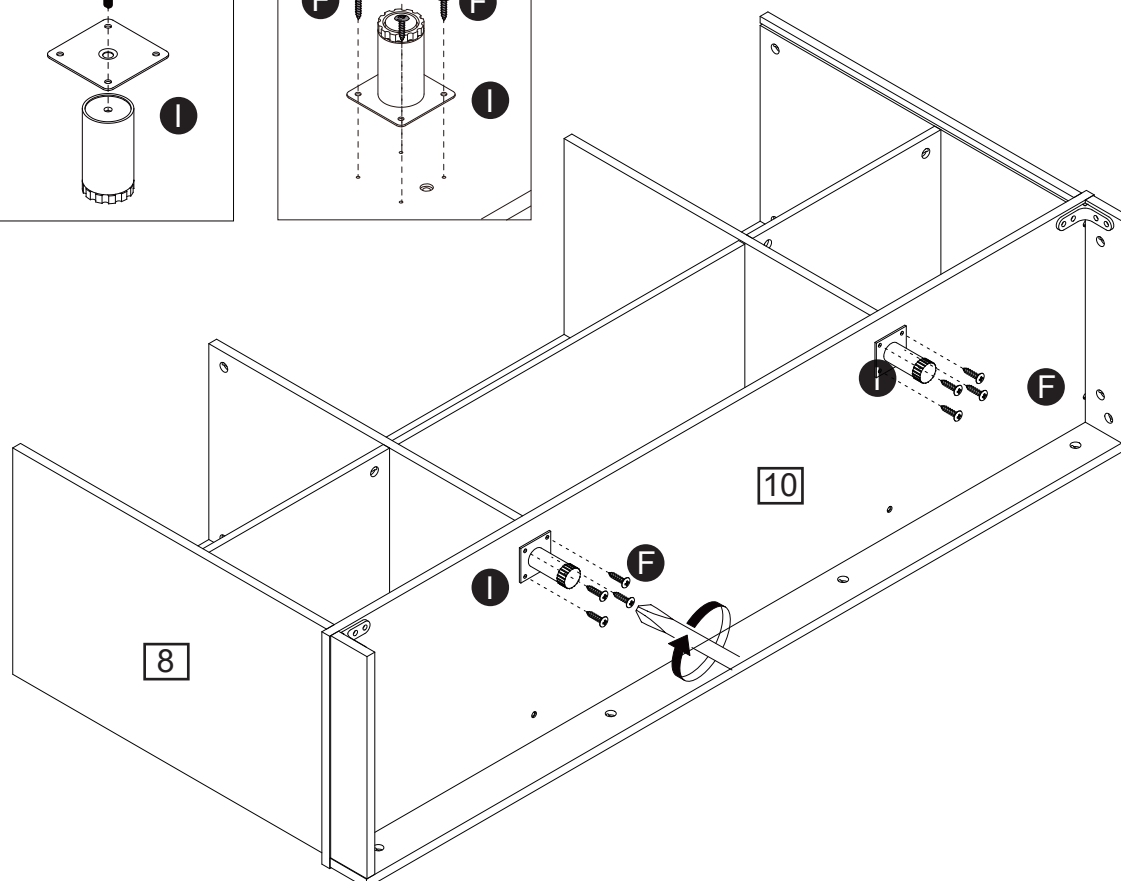

15

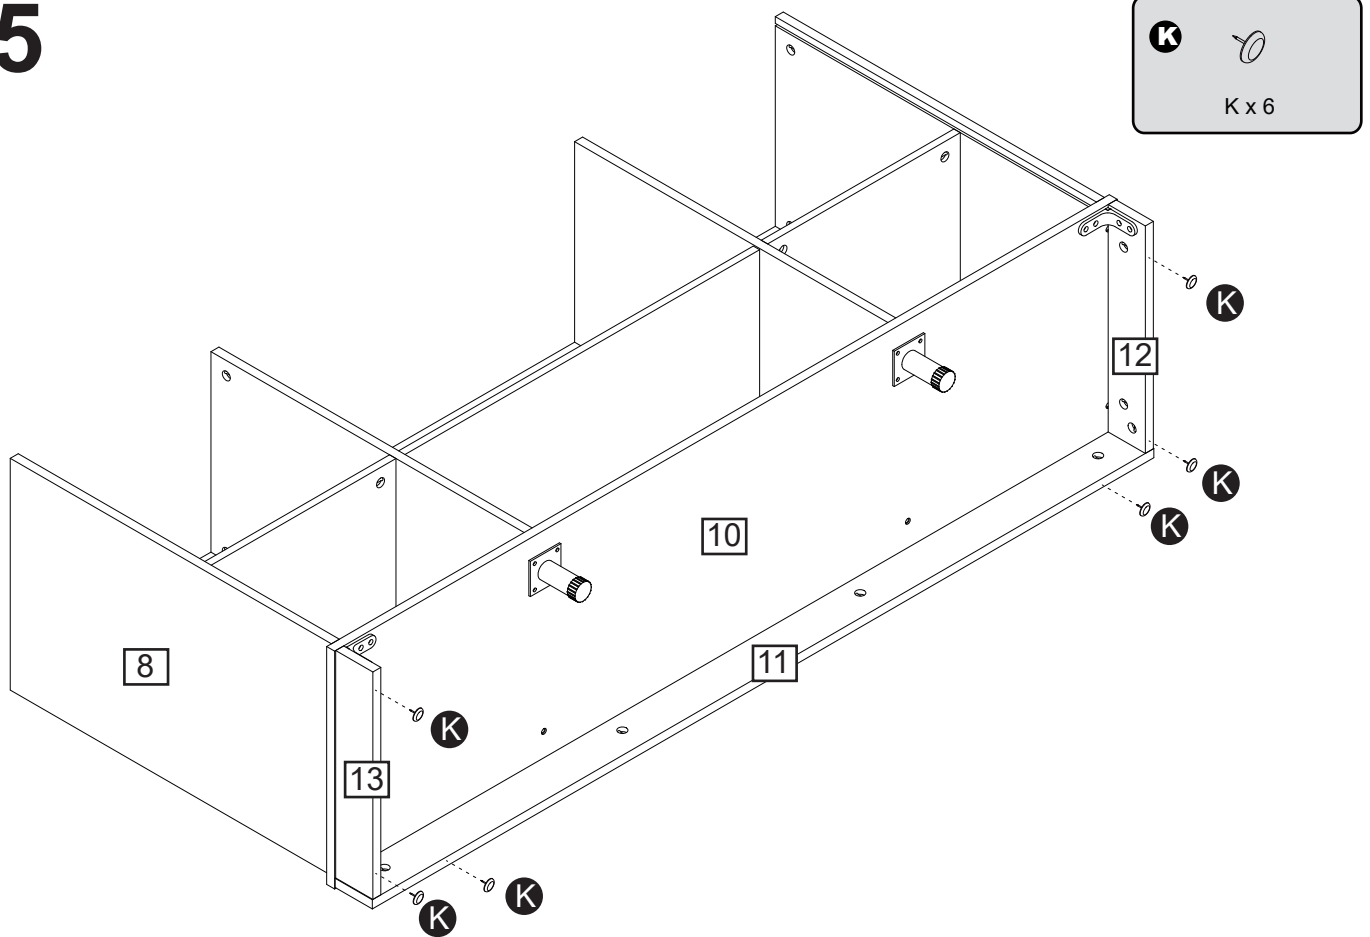




16

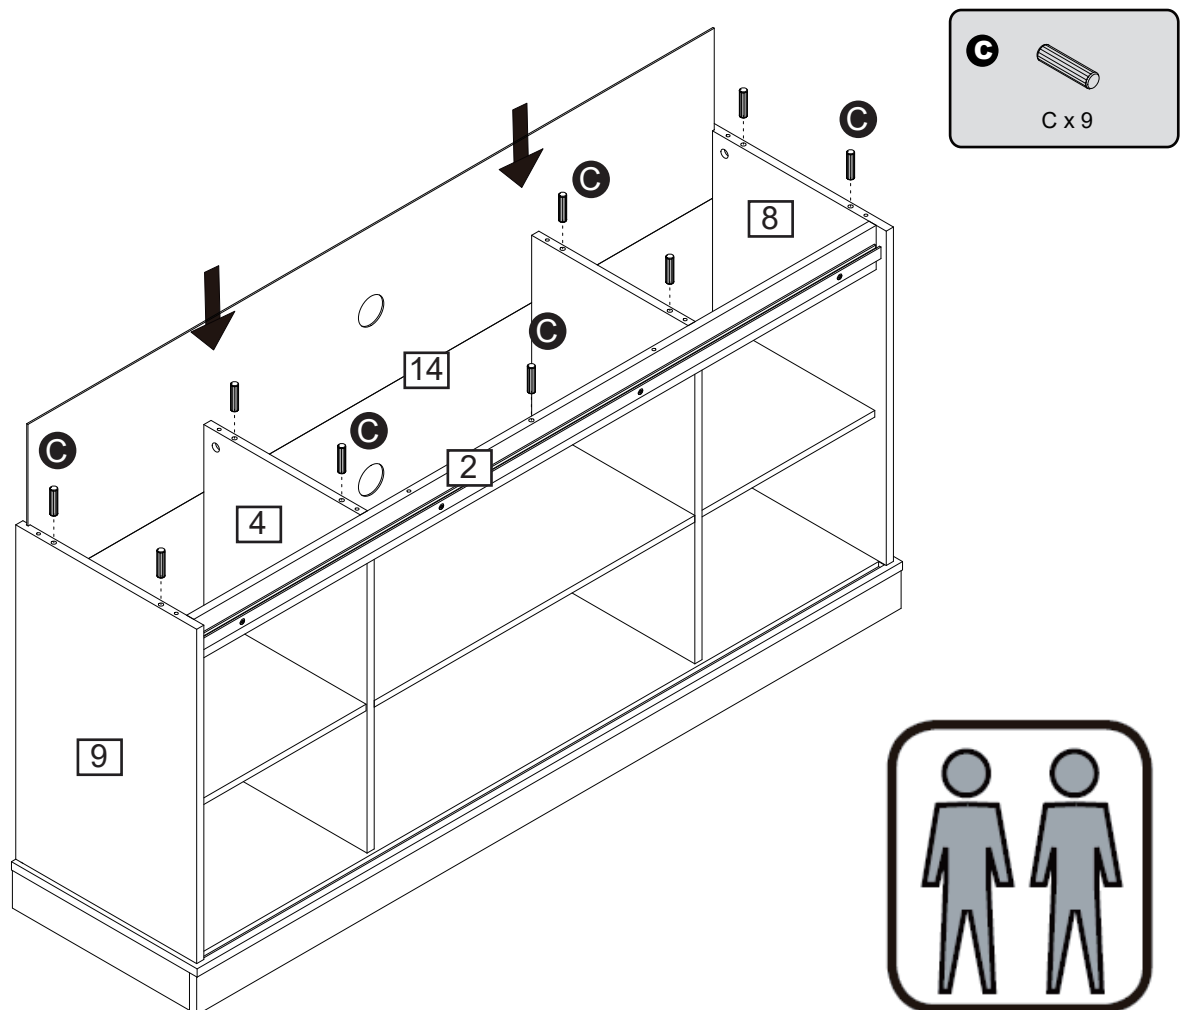




17

CAM-LOCK


Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example below)

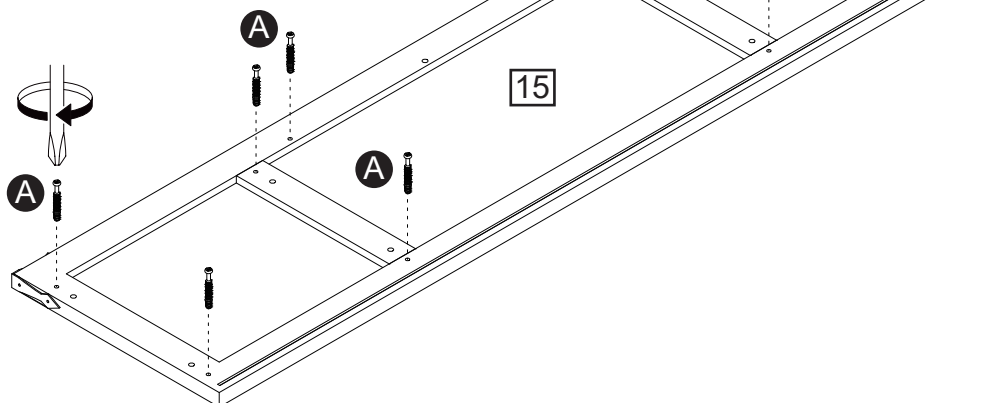


18

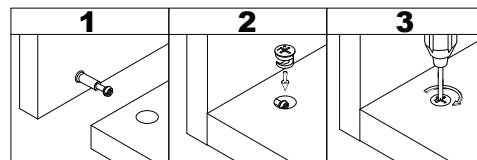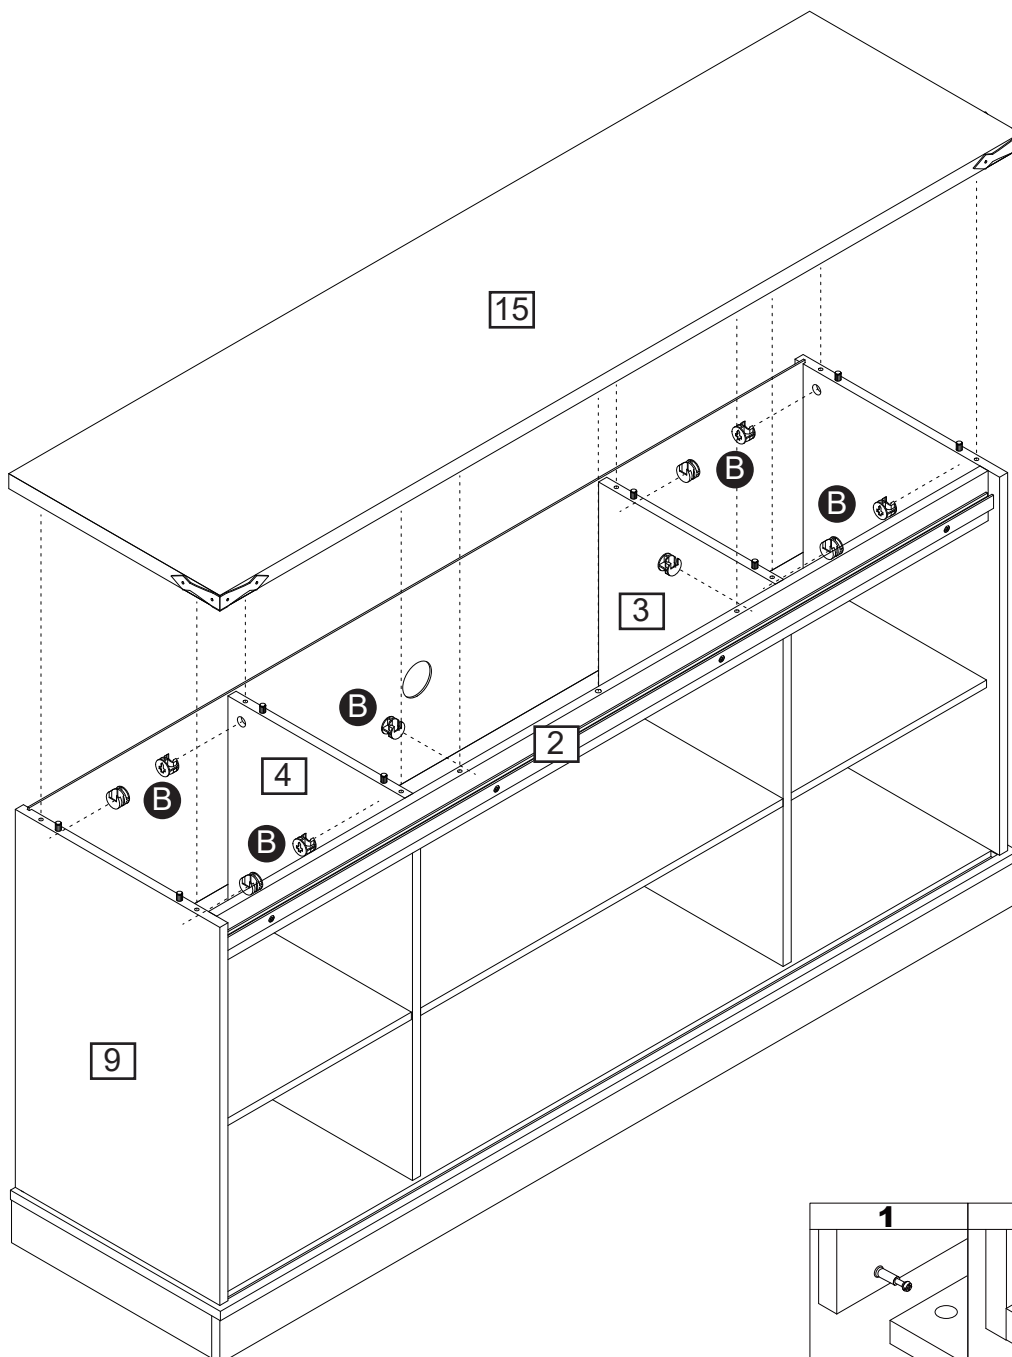





19

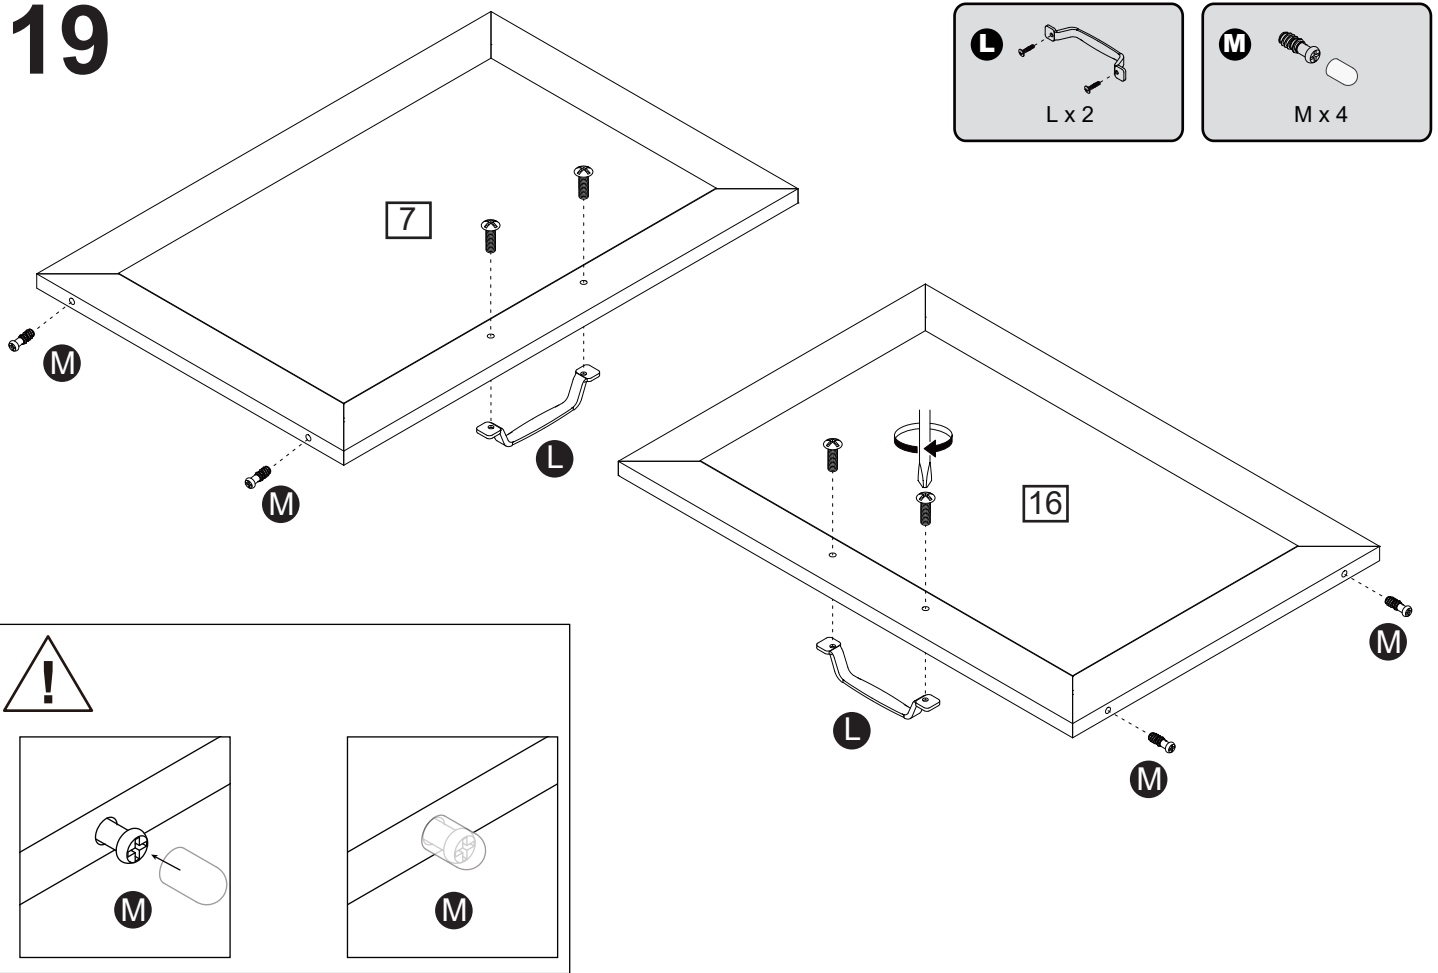


20

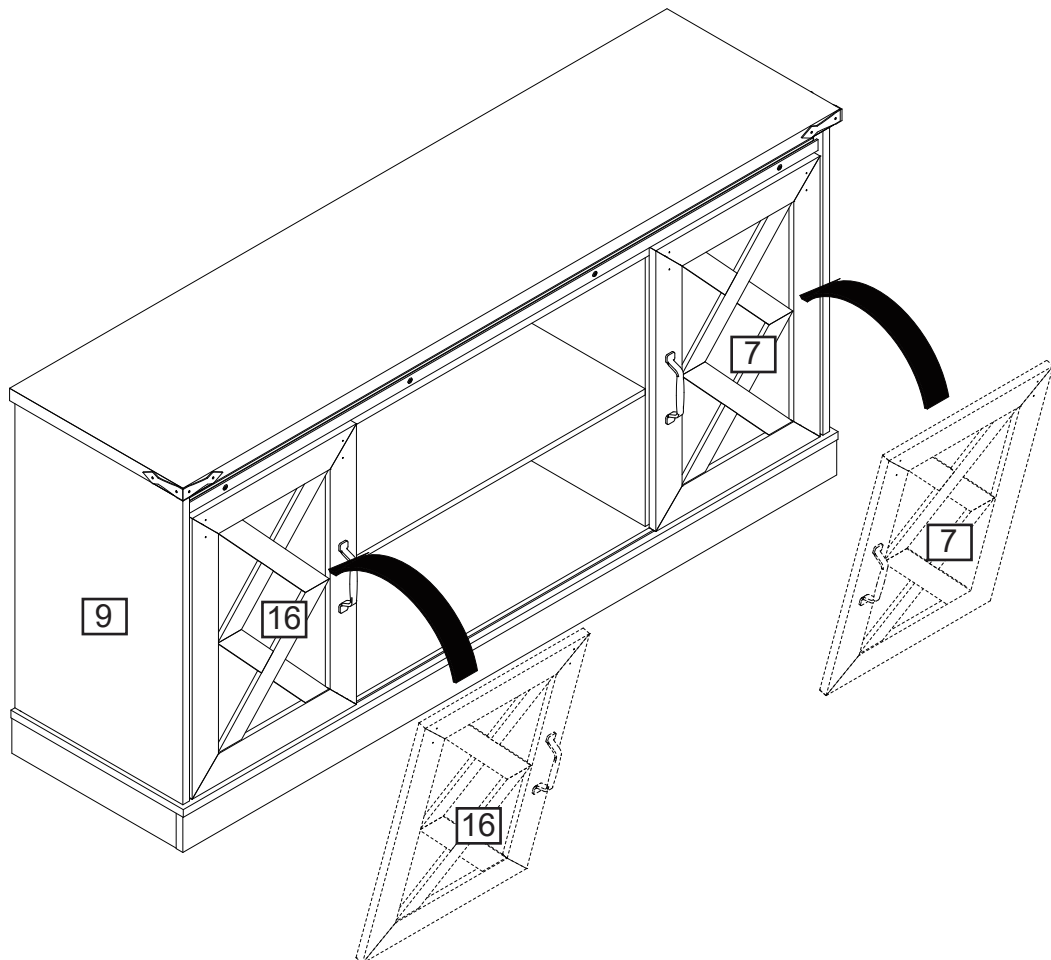




21

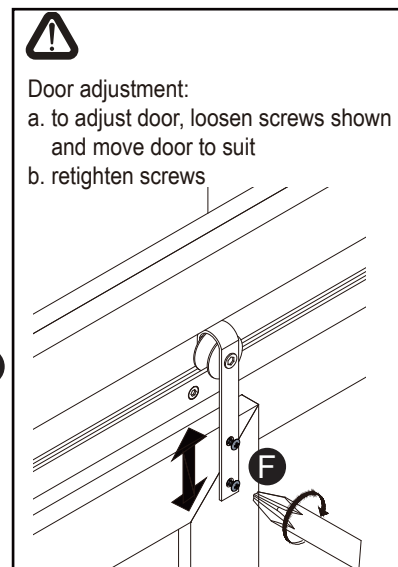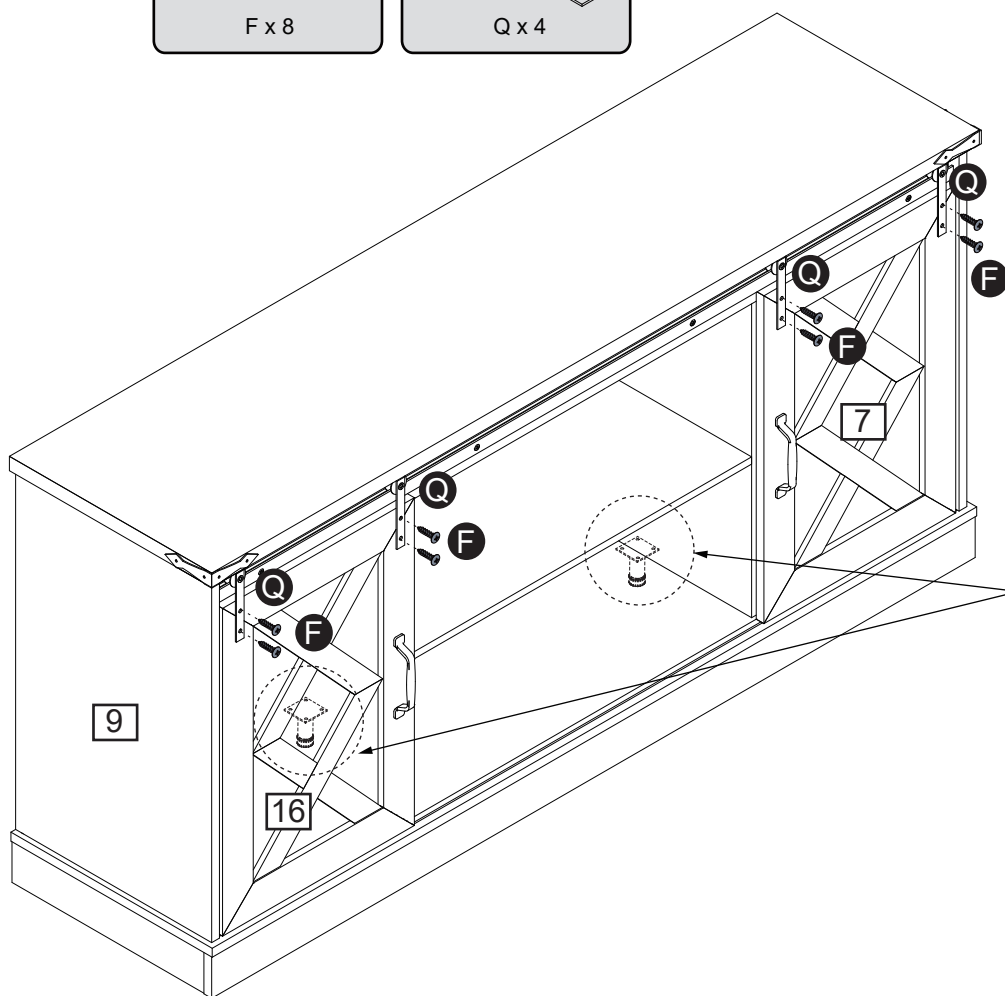



Please adjust the height of the legs to keep the bottom level.

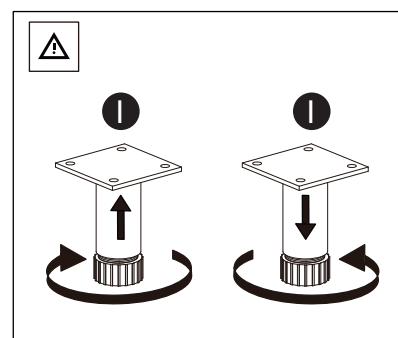


22

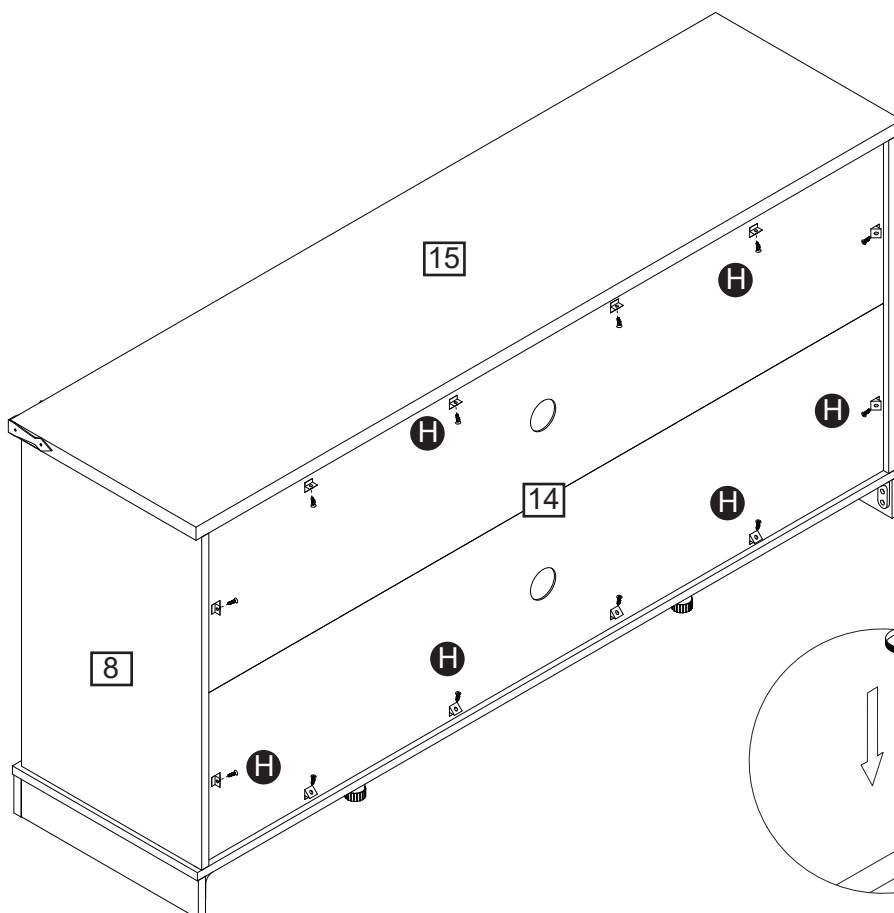

23

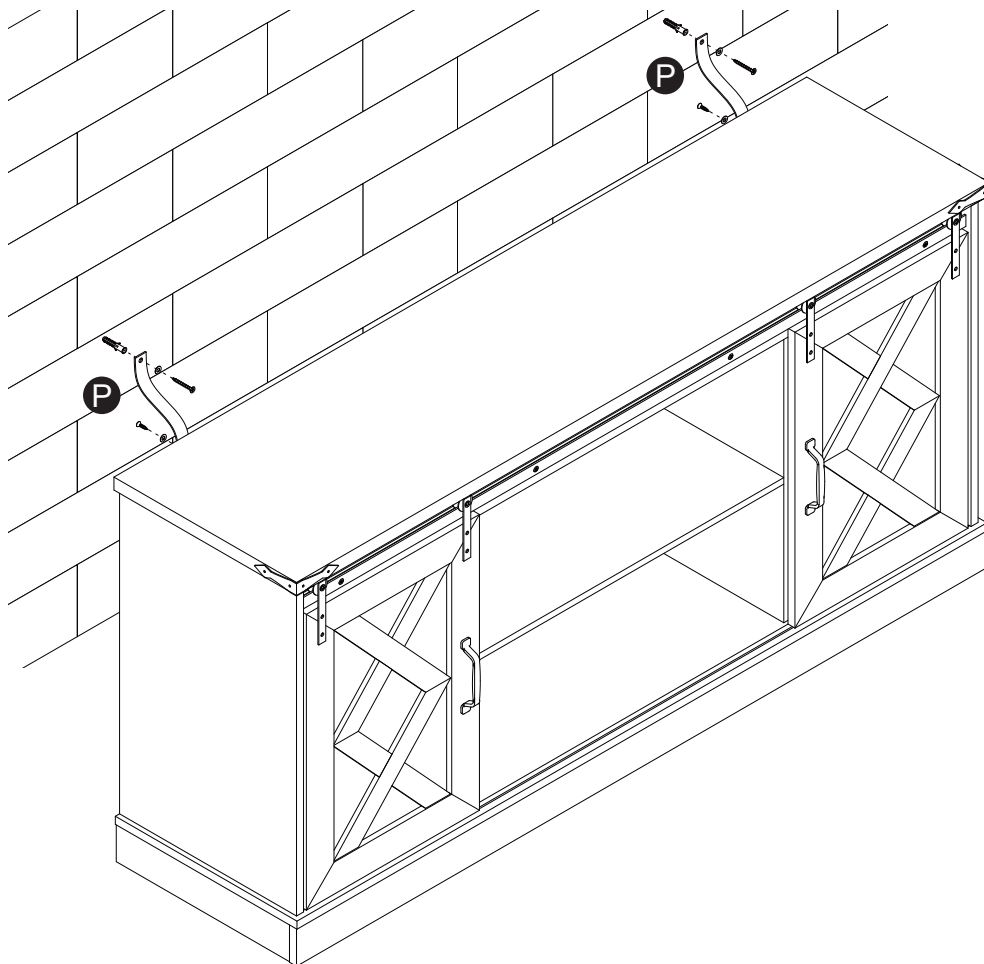

24

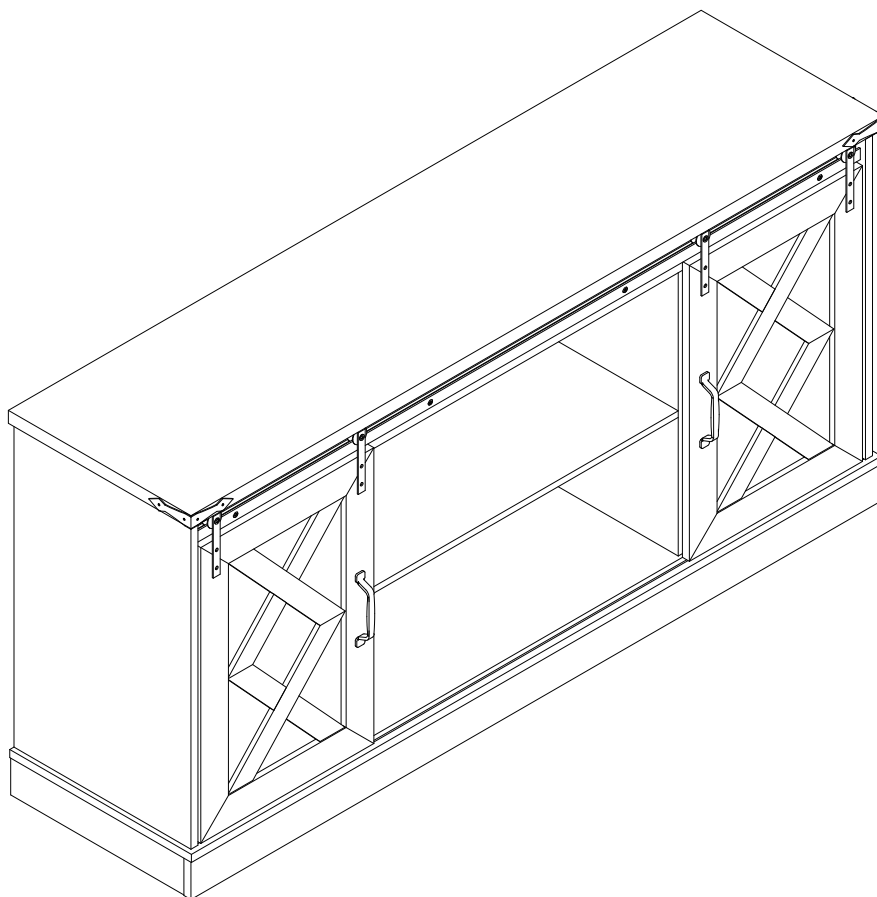

A Guide to Wall Mounting & Fixings

Important note:

If plastic wall plugs (rawl plugs) are supplied with your product, e.g.:



- these are only suitable for use in masonry walls.

If you are in any doubt about the correct wall plugs for your wall, seek professional advice.


Failure of the product due to using the incorrect fixings is the responsibility of the installer.



Important: when drilling into walls always check that there are no hidden wires or pipes etc.

Make sure that the screws and wall plugs being used are suitable for **supporting your unit**. **Consult a qualified tradesperson if you are unsure.**


Hints:

- 1: General rule:  always use a larger screw and wall plug if you are not sure.
- 2: Ensure you use the recommended drill bit to match the wall plug and hole size.
- 3: Ensure you drill the hole horizontally; do not force the drill or enlarge the hole.
- 4: Take extra care when drilling high walls, ceilings and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid the tiles splitting or cracking.
- 5: Ensure wall plugs are well fitted and are a tight fit in the drilled hole.

Types of walls


You can use one of the following types of wall plug if your walls are made of brick, breeze block, concrete, stone or wood.

No.1 "General Purpose" wall plug

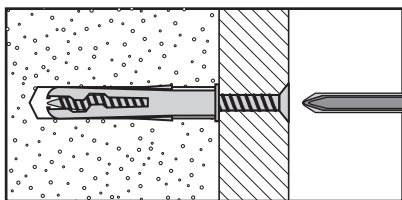


Generally aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

No.3 "Cavity Fixing" wall plug

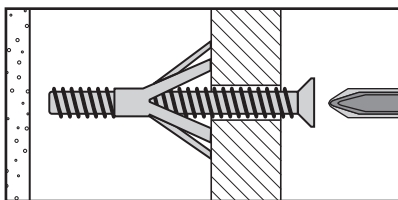


For use with plasterboard partitions or hollow wooden doors.

No.5 "Hammer Fixing" wall plug

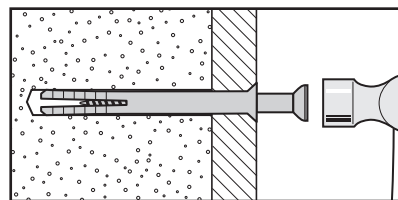


For use with walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

No.2 "Plasterboard" wall plug

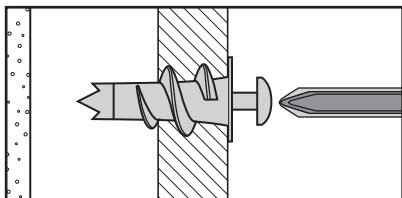


For use when attaching light loads onto plasterboard partitions.

No.4 "Cavity Fixing – Heavy Duty" wall plug

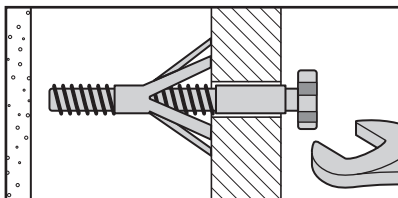

For use when fitting or supporting heavy loads such as shelving, wall cabinets and coat racks.

No.6 "Shield Anchor" wall plug – heavy loads

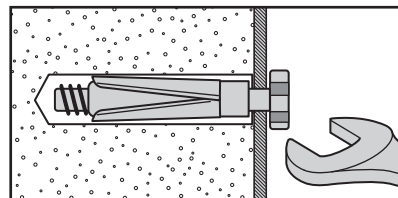

For use with heavier loads such as TV and HiFi speakers and satellite dishes etc.



Care & Maintenance

Safety: always check the fitting and location to ensure your safety in and around the home.

Fitting: from time to time check the fitting to ensure the wall plugs or screws do not become loose.