


# Kviflon

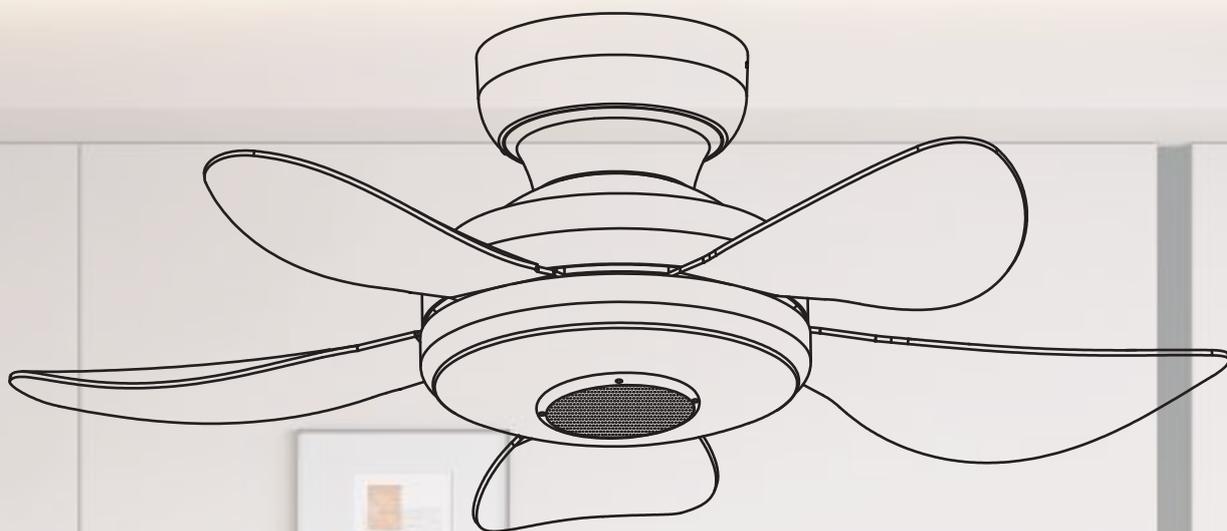

## 36/46 INCH CEILING FAN WITH LIGHT USER MANUAL

Size: 36in/46in  
Brand: Kviflon

Color: Black/White/Brown  
Light Wattage: 24W



Installation Video

Model No: 8922-RGB



**WARNING:** To avoid fire, shock and serious personal injury, please read the following instructions carefully.


## Important Safety Instructions


1. Read all instructions and safety information before installing your new fan. Review the accompanying assembly diagrams.
2. Before installing the fan, disconnect the power by removing fuses or turning off circuit breakers.
3. Make sure all electrical connections comply with local codes, ordinances, or National Electrical Codes. Hire a qualified electrician or consult a do-it-yourself wiring handbook if you are unfamiliar with installing electrical wiring.
4. Make sure the installation site you choose allows the fan blades to rotate without any obstructions. Allow a minimum clearance of 7 feet from the floor to the trailing edge of the blades.
5. If you are mounting the fan on a ceiling outlet box, use a metal outlet box. Secure the box directly to the building structure. The outlet box and its support must be able to support the moving weight of the fan (at least 50 lbs.). Do not use a plastic outlet box. Attach the mounting bracket by using the hardware supplied with the ceiling outlet box.
6. If you are mounting the fan to a joist, make sure it is strong enough to support the moving weight of the fan (at least 50 lbs.)
7. After installing the fan, make sure all the connections are secured. This will prevent the fan from falling.
8. Do not insert anything into the fan blades while the fan is operating.
9. Turn the fan off and wait for it to stop before reversing fan direction.
10. To reduce risk of electrical shock and personal injury, do not install the fan on a sloped ceiling.
11. To reduce the risk of electrical shock and personal injury, do not use this fan with any solid-state.
12. To reduce risk of personal injury, use only the two steel screws and lock washers provided with the fan for mounting the outlet box.

## Table of Contents

SAFETY PRECAUTIONS.....	1
ASSEMBLY DRAWING & PARTS LIST-WITH LIGHT.....	2
HOW TO INSTALL THE FAN WITH LIGHT.....	3-5
INSTALL THE CEILING BRACKET.....	6
MAKE THE ELECTRIC CONNECTIONS.....	7
INSTALLATION COMPLETED.....	8
REMOTE CONTROL SETTING AND OPERATING.....	9-10
APP INSTRUCTIONS.....	11

## Product Instruction

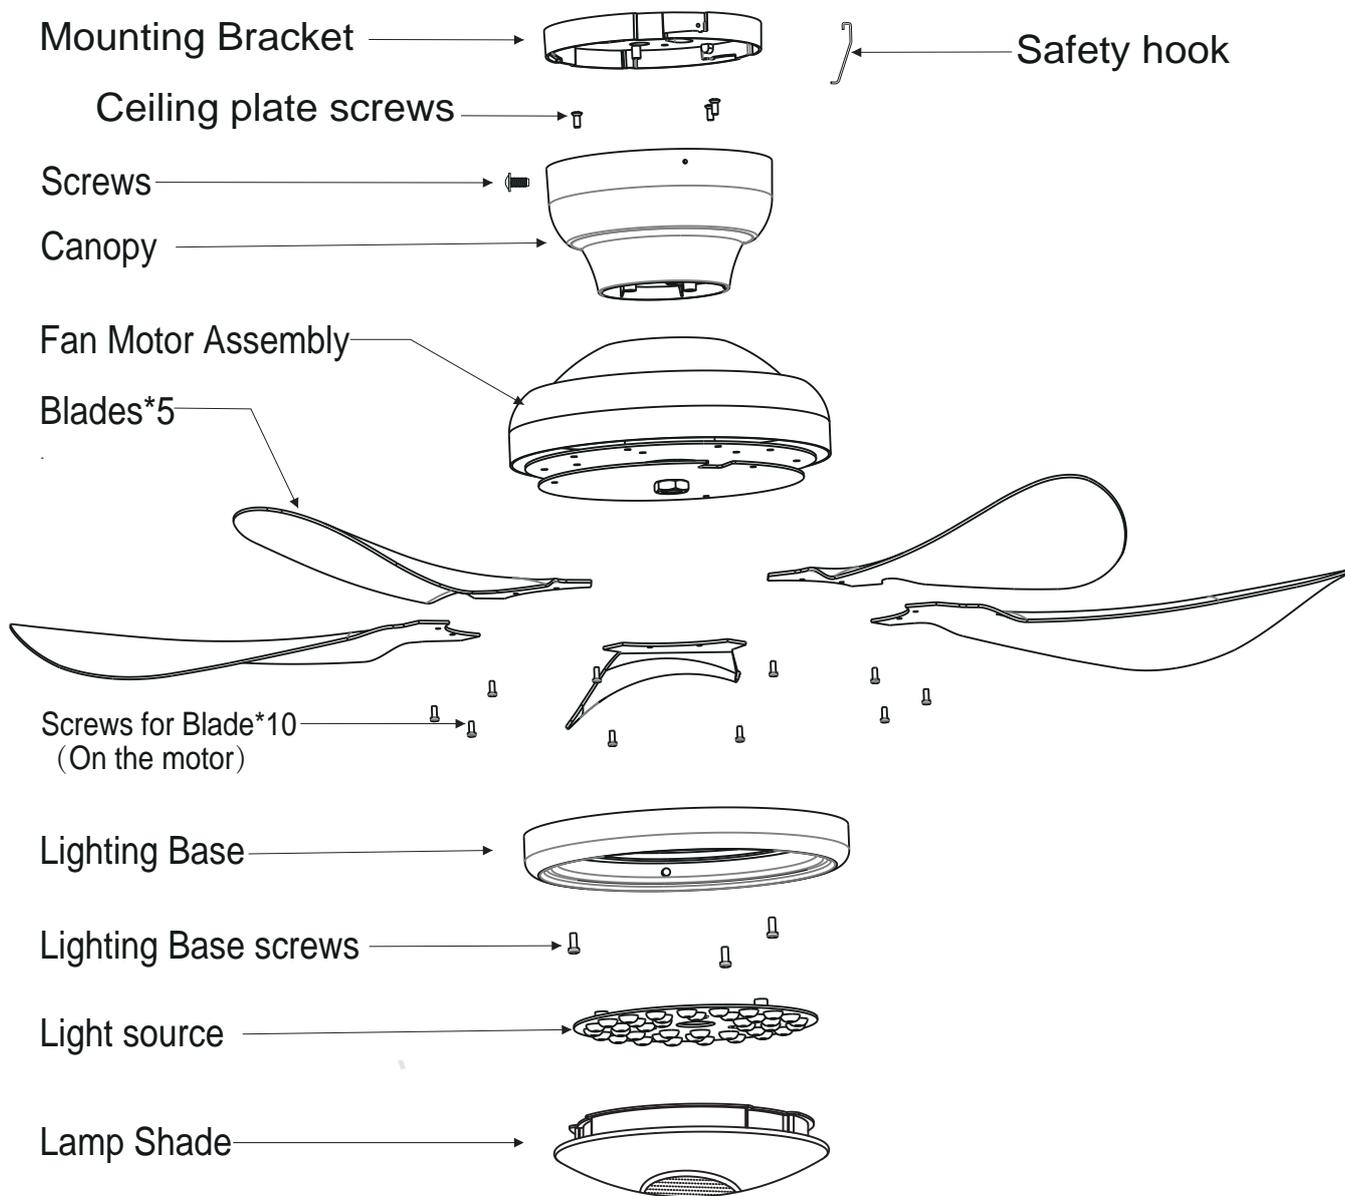

Item no.	Reference Image	Qty.
1	 ST5x35 Setscrew	x4
2	 Expansion Screw	x2




Receiver

RemoteControl


# HOW TO INSTALL THE FAN WITH LIGHT

1: Install Canopy onto the motor

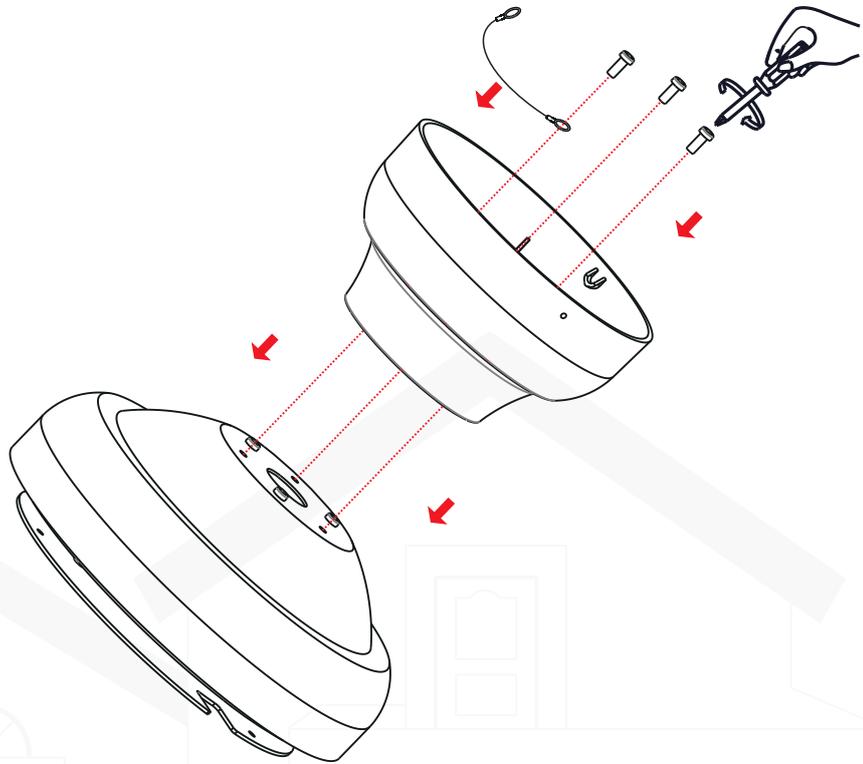

(Figure 1)


2: Installation and disassembly of blades

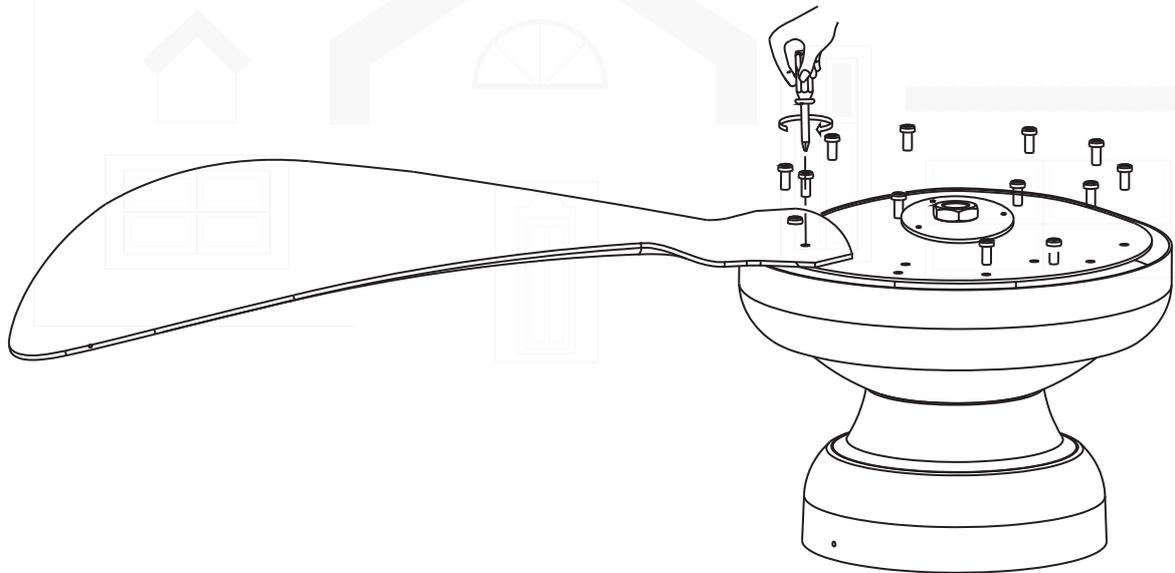

(Figure 2)


## HOW TO INSTALL THE FAN WITH LIGHT

3: Remove the lampshade and light source from the light source box in sequence, and set them aside for future use

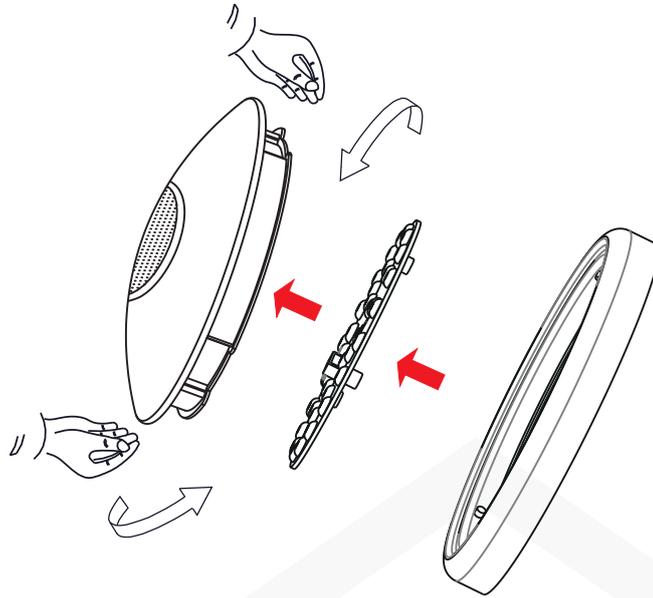

(Figure 3)


4: Remove the screws at the bottom of the motor in sequence and install the light source box onto the motor

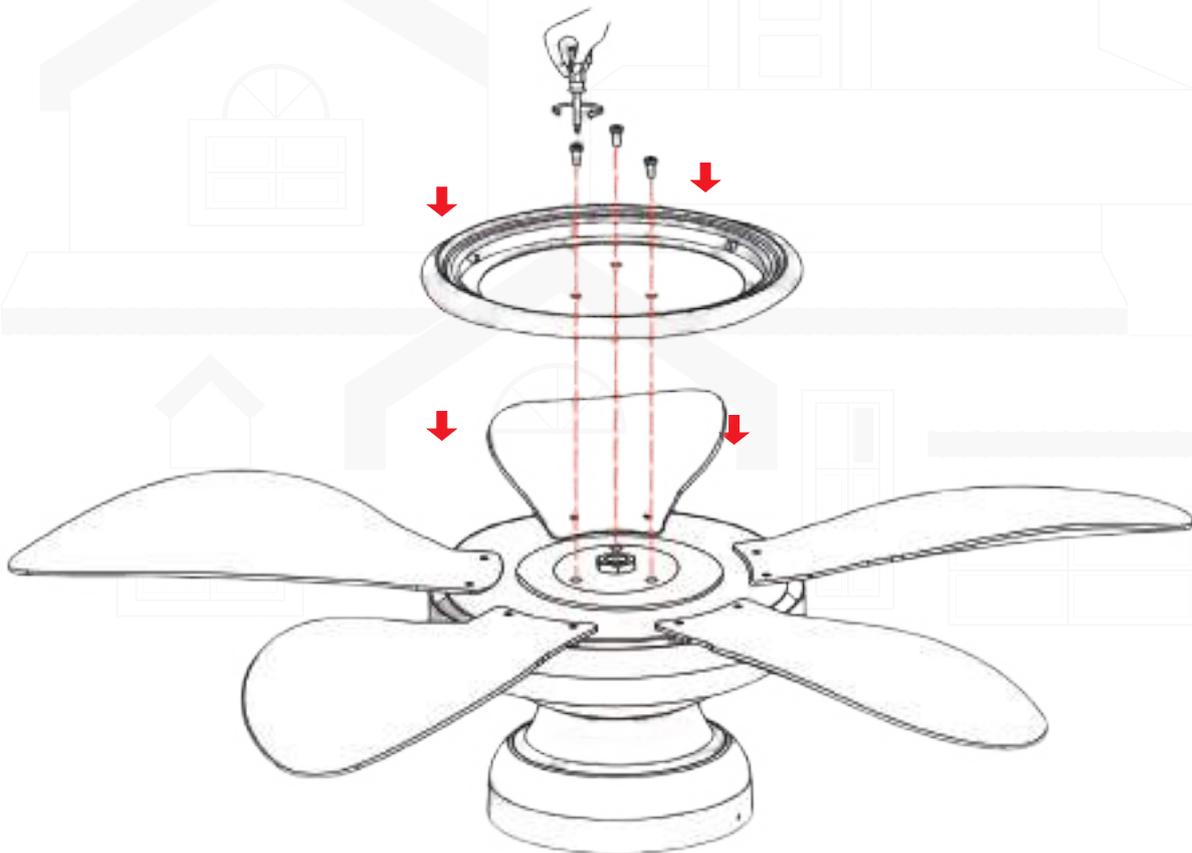

(Figure 4)

# HOW TO INSTALL THE FAN WITH LIGHT


5: Insert the power cord through the LED patch light source and connect it to the LED patch light source. Fix the LED patch light source upwards onto the lamp body

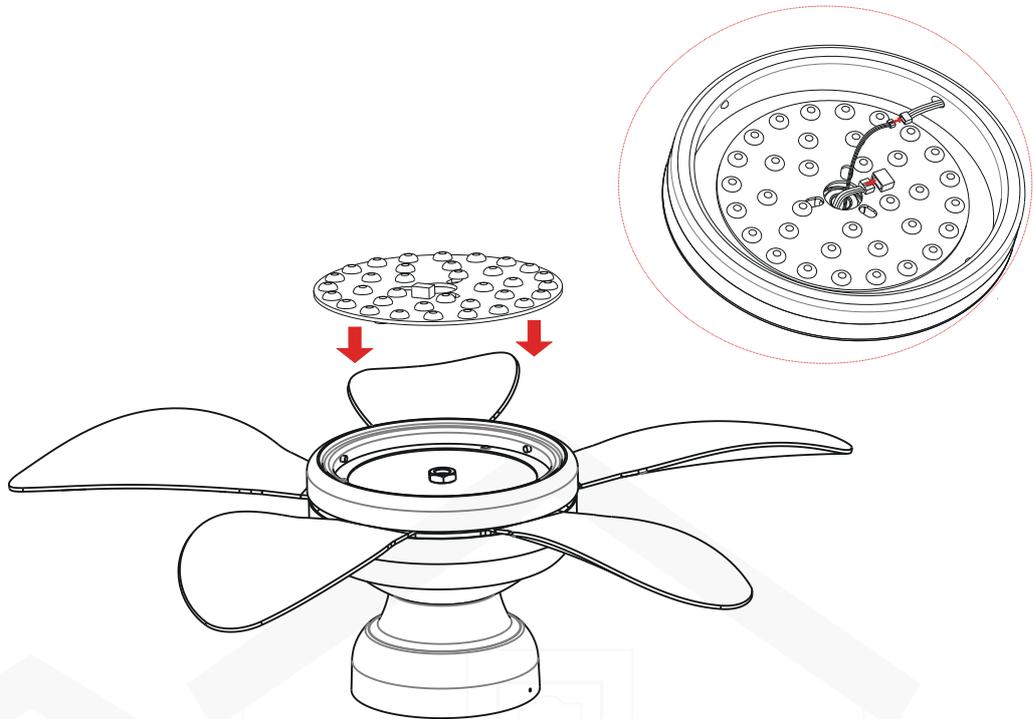

(Figure 5)

6: Installing Lamp shade

**⚠ WARNING** Take care not to over tighten when installing the glass shade

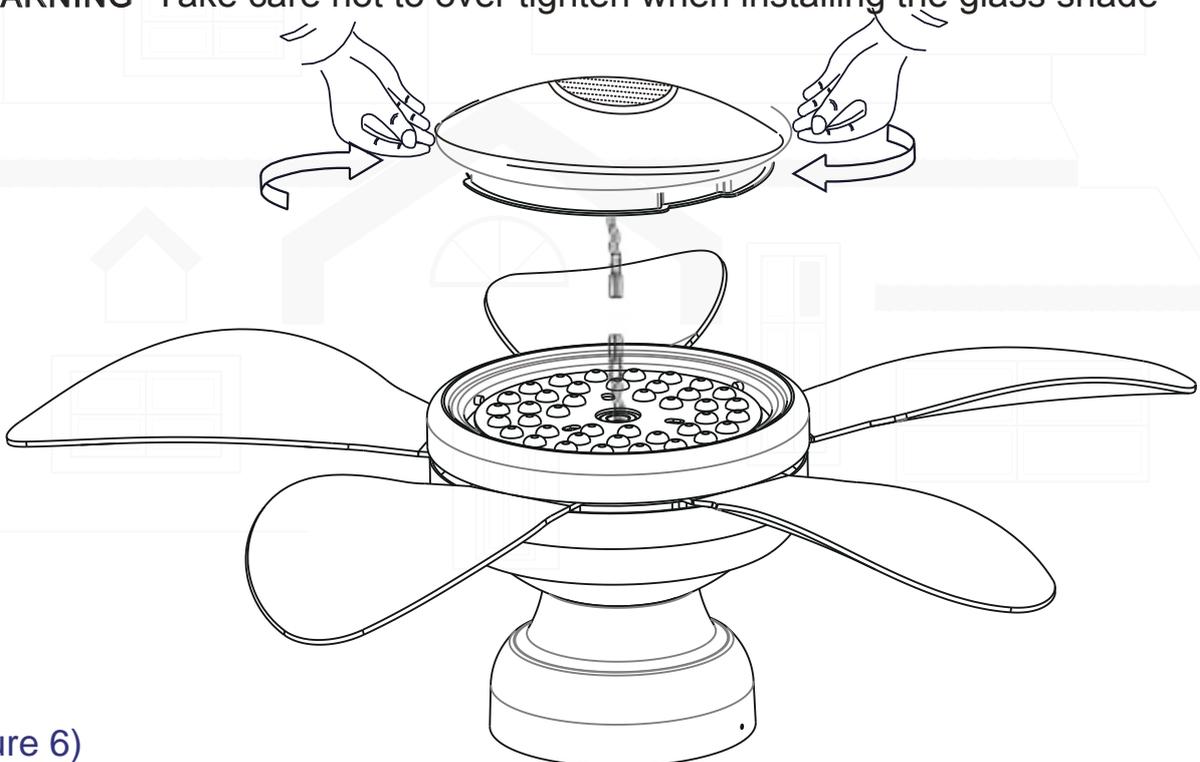

(Figure 6)

# INSTALL THE CEILING BRACKET

## Tools and Materials Required



External Hexagonal Wrench



Wire Stripper



Phillips Screwdriver



Step Ladder

The ceiling fan must be installed in the location where there is 12" (300mm) spacing from the tips of all blades to the nearest objects or walls. REMEMBER to turn off the power before hanging the fan. Follow the instruction below to hang your fan properly:

1. For concrete ceiling, drill two holes in the ceiling and secure the mounting bracket to the ceiling with two  $\Phi$  0.32" (8mm) (distance between the two holes should be appropriate) expansion screws, washers and nuts provided and tighten with a spanner.


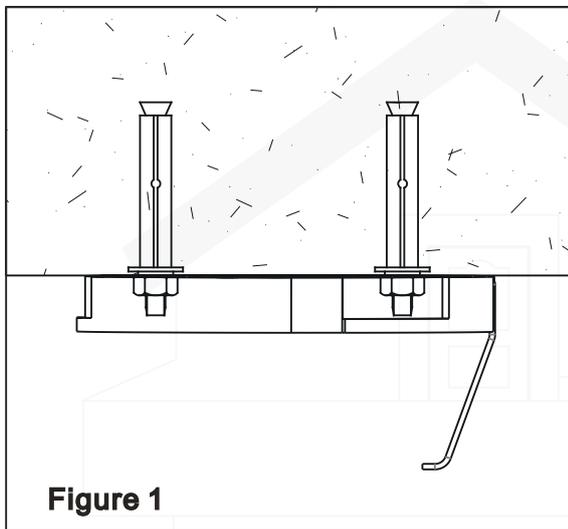


Figure 1

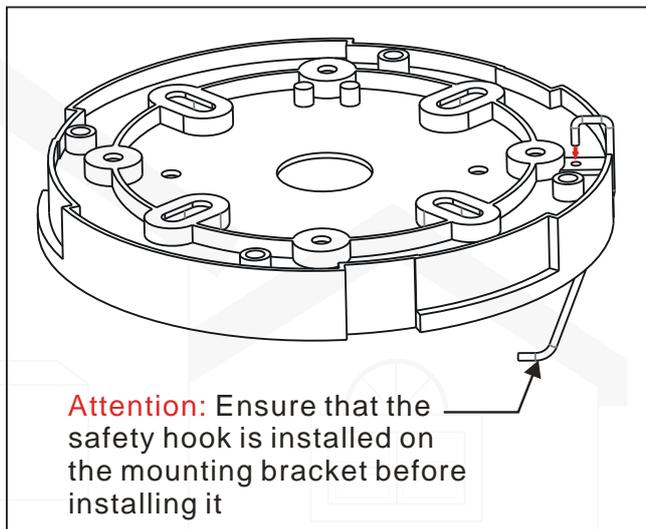

2. For wood ceiling, secure the mounting bracket to the ceiling that is capable of carrying a load of at least 100lbs (45kgs) with two long mounting screws and washers provided. Be sure at least 0.12" (30mm) of the screw is threaded into the support.


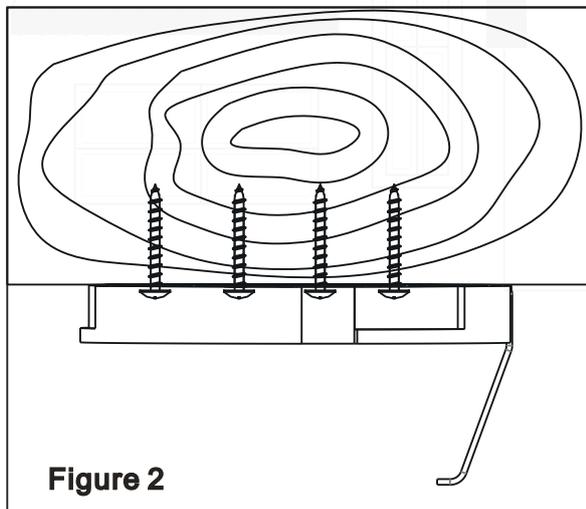



Figure 2

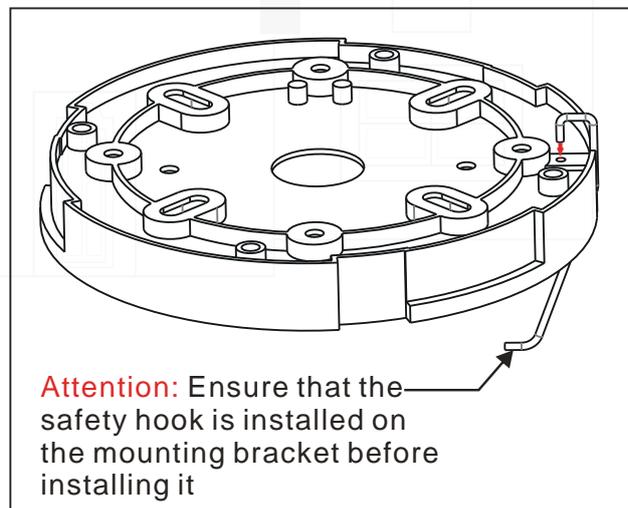


# MAKE THE ELECTRIC CONNECTIONS

**⚠ WARNING** To avoid possible electrical shock, be sure the electricity is turned off in the main fuse box before wiring


1. Connect the black wire on the motor to the live wire in the room, the white wire on the motor to the natural wire in the room, and connect the yellow ground wire on the ceiling mounting plate to the ground wire in the room
2. Connect the same color wire on the receiver and fan body together
3. After wiring is completed, fix the fan lamp body onto the hanging board with screws

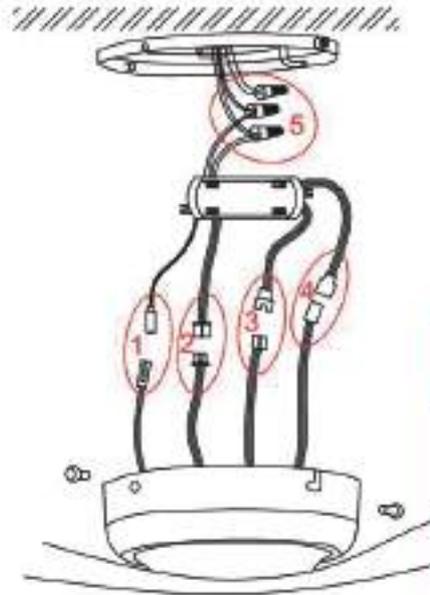


**⚡ WARNING**  
All wiring must be in accordance with national and local electrical codes ANSI/NFPA 70. If you are unfamiliar with wiring or in doubt, consult a qualified electrician.

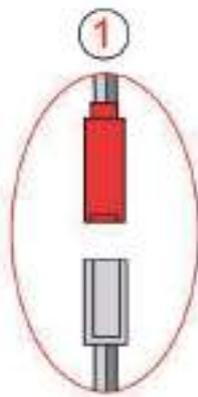


grey and white lines  
Bluetooth plug

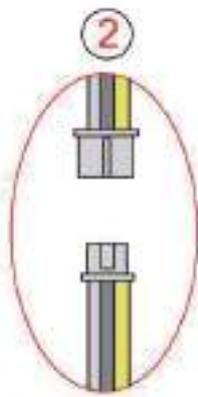

white yellow  
grey wire  
light source plug

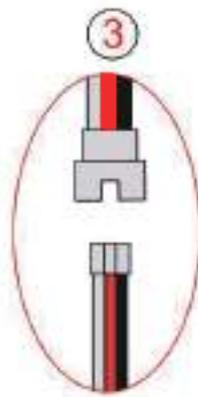

black red  
white wire  
RGB light source plug

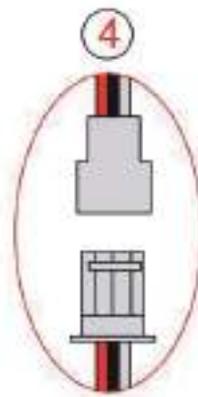


red white  
black wire  
motor plug



black--live wire  
white--neutral wire  
yellow green--earth

## INSTALLATION COMPLETED

Installation is now finished . Turn on the power switch. Then the fan lights are on Test and pair your fan immediately using the remote control


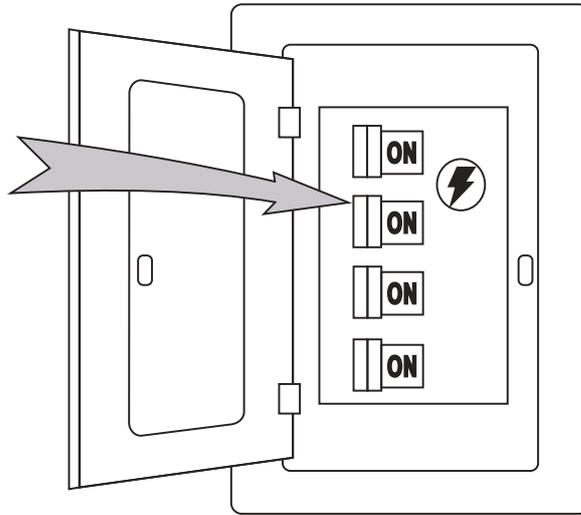


## MUSIC PLAY SETTING

There are two ways to play music available for selection.

- 1• Turn on the wall switch, the light comes on, and then use the remote control to play the music stored inside the fan lamp.
- 2• Turn on the wall switch, the light comes on, and then use the mobile phone's Bluetooth to search for the Bluetooth of the fan lamp and pair it. ( Fan Lamp Bluetooth Name: Speaker Light L2 ) Then use the music player on your mobile phone to play the music.

# REMOTE CONTROL SETTING AND OPERATION

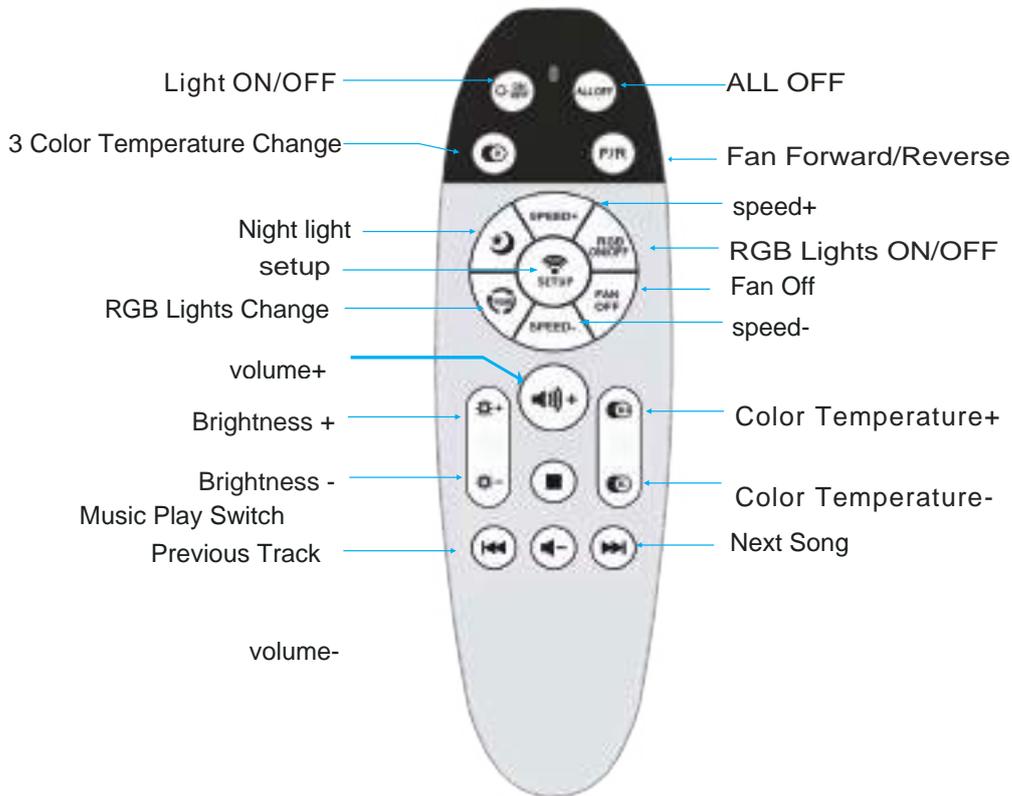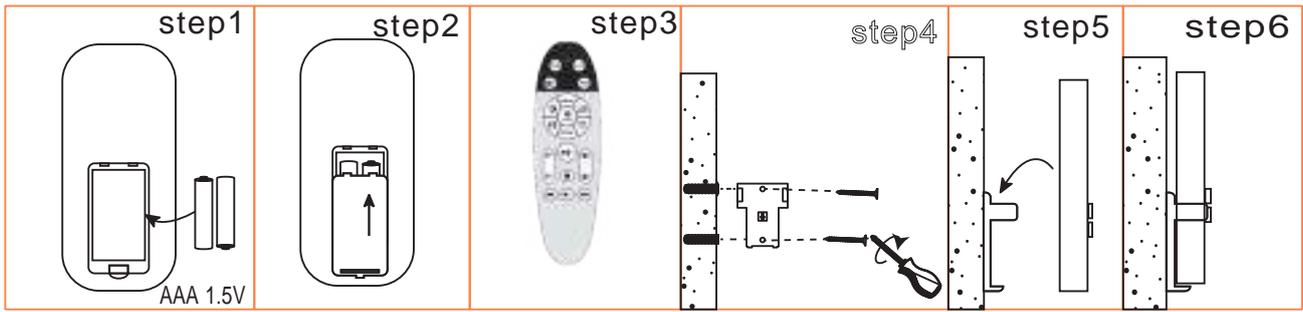

## 1: How do I re-pair the remote control with the fan if the remote control is operating abnormally?

**A:** The remote transmitter should already be paired to the receiver and ready to use.

You can strengthen the connection between the remote control and the ceiling fan through the following operations:

1. Turn off the power to the fan and then turn on the power.
2. Within five seconds of turning on the power, press and hold the "  " button with the remote control for more than five seconds, and pairing is complete.

(To prevent faulty operation, please ensure all other ceiling fans within range are turned off at the wall switch while pairing.)



## IMPORTANT REMINDERS

1. Please note: Receiver must be correctly installed in the mounting bracket on fan
2. When the transmitter cannot control the receiver, please check the battery has sufficient charge in the transmitter.
3. When the transmitter cannot control the receiver, please check if there is any existence of similar remote controlled products nearby, causing interference with each other.
4. Low power of battery will affect the sensitivity of the transmitter and the signal reception accordingly, must replace if the battery is getting low power.
5. Please take the battery out from the transmitter when leaving unused for a long time, to avoid battery leaks.
6. Isolation Switch “Must be connected in the line.”
7. When power is cut to the unit (via a blackout or otherwise) when power is restored the light will come on.

Before carrying out any cleaning or maintenance work, always make sure that the appliance is disconnected. LED lights are not removable. LED lights can only be used within the product delivery, they can not be replaced.

## Wall Switch

In order to ensure the normal work of LED LIGHT, recommend to use ordinary wall switch.



**NOTE: ( POWER OFF from Wall Switch that default memory function is cleared )**



(FIGURE 1)

## Mobile phone download and installation

Scan the QR code with the mobile phone scan function, or search "FanLamp Pro" in the app store and press download to install

 (Keep Bluetooth on)



(FIGURE 2)



(FIGURE 3)



(FIGURE 4)

① Download installer (Figure 2)

② Turn on Bluetooth (Figure 3)

③ Open "FanLamp Pro" to enter the main page (Figure 4)



(FIGURE 5)



(FIGURE 6)



(FIGURE 7)

④ Press "+" to add a new fan lamp (Figure 5)


⑤ Enter the control page after creating (Figure 6)

⑥ In order to ensure that the application successfully controls the device, please click this button within 5 seconds after the device is powered on. If the device flashes or beeps, it means that the mobile phone is successfully paired with the device, and the device can be controlled through the application (Figure 7)

# LIGHTING

# Kviflon

Manufacturer: Longxuang Lighting Co., Ltd  
E-mail: Longxuang2022@163.com

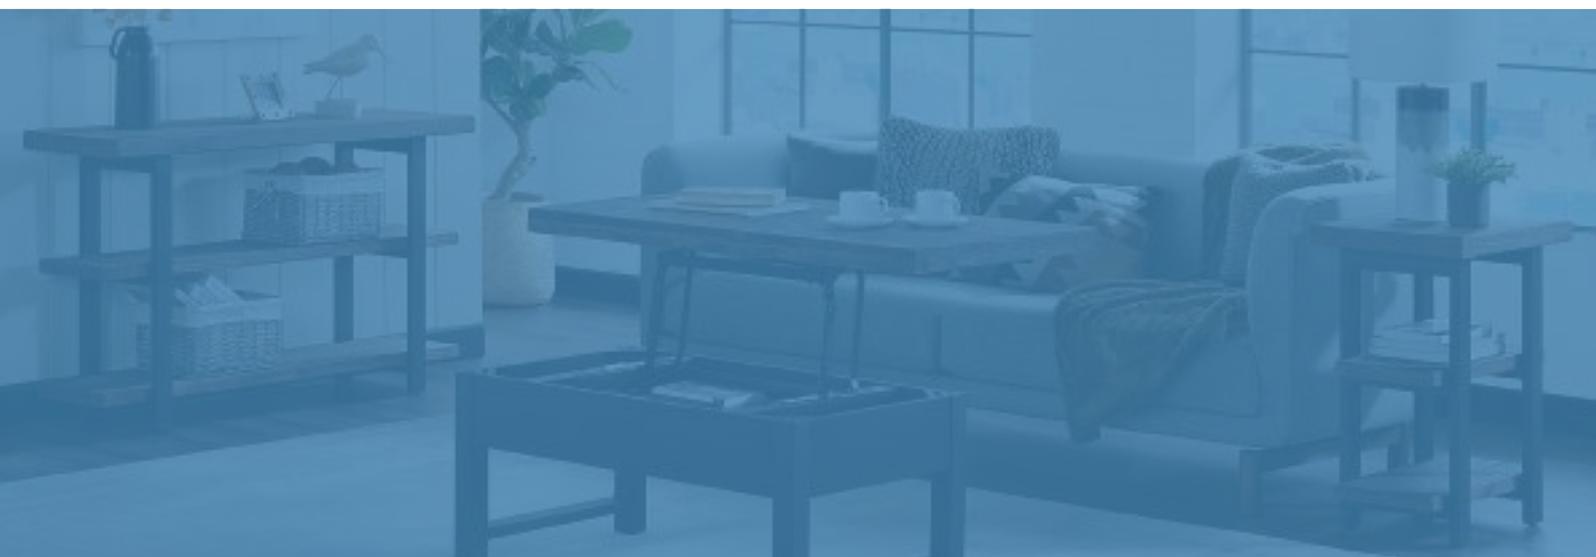

**MADE IN CHINA**