
INSTALLATION INSTRUCTIONS

Installation Manual



IAPMO RESEARCH AND TESTING, INC.



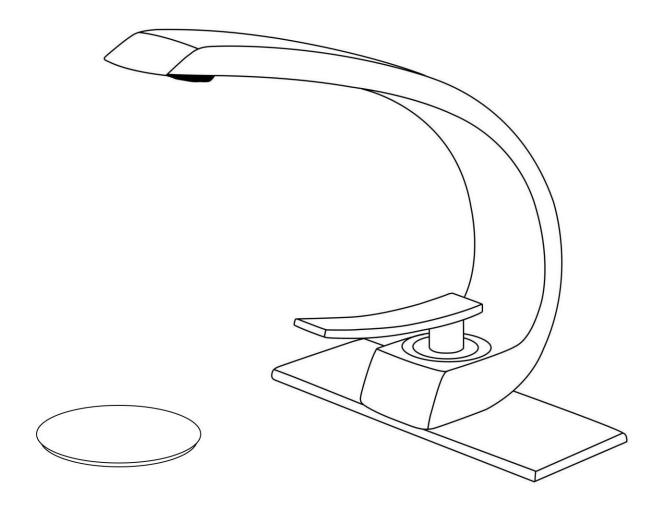









IAPMO RESEARCH AND TESTING, INC.









CERTIFICATE OF LISTING





IAPMO RESEARCH AND TESTING, INC.
















INSTALLATION STEPS

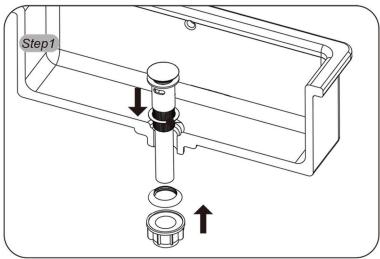


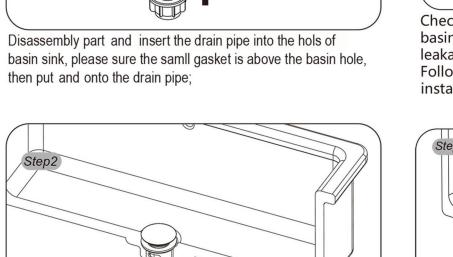

Tighten the fasten nut by hand;

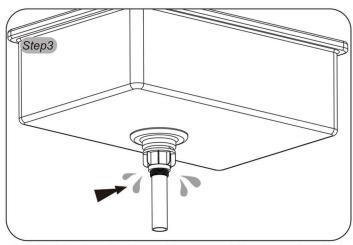


Check whether leakage happened here under the basin sink; You need apply some silicone to prevent leakage issue if there is leaksge under the basin sink, Follow steps 4 to apply the silicone and complete installation;

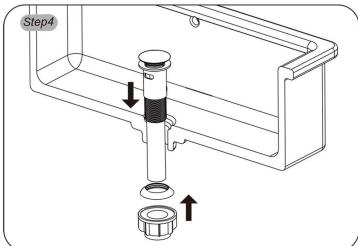


At this step, small gasket is not needed, please follow the step 2 and step 3 to complete installation.


INSTALLATION STEPS

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.




Before installing the product, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the product.







1. Remove the rubber washer, metal washer and locking nut from the faucet.




2. Screw and hand tighten the hot and cold flexible hoses to the faucet. DO not use a wrench to tighten hoses as this may damage the hose and/or the hose threads.




3. Install faucet through center hole.



4. Re-install the rubber washer followed by the metal washer and lock-nut. Hand tighten then tighten further using a screw driver to tighten lock-nut screws.



5. Attach flexible hose to water supply.



CLEANING CARE

In order to keep the appearance of product clean, bright and good performance, please take care of the product as follows;

- 1. Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc;
- 4.Do not use acid cleaner, or cleaner and soap with insoluble gran etc;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show,

The bubbler can be unscrewed, rinsed with water, and then installed back in place.

Please feel free to contact us if you have any questions. We will help to solve the issue together with you.