


# Assembly Instructions

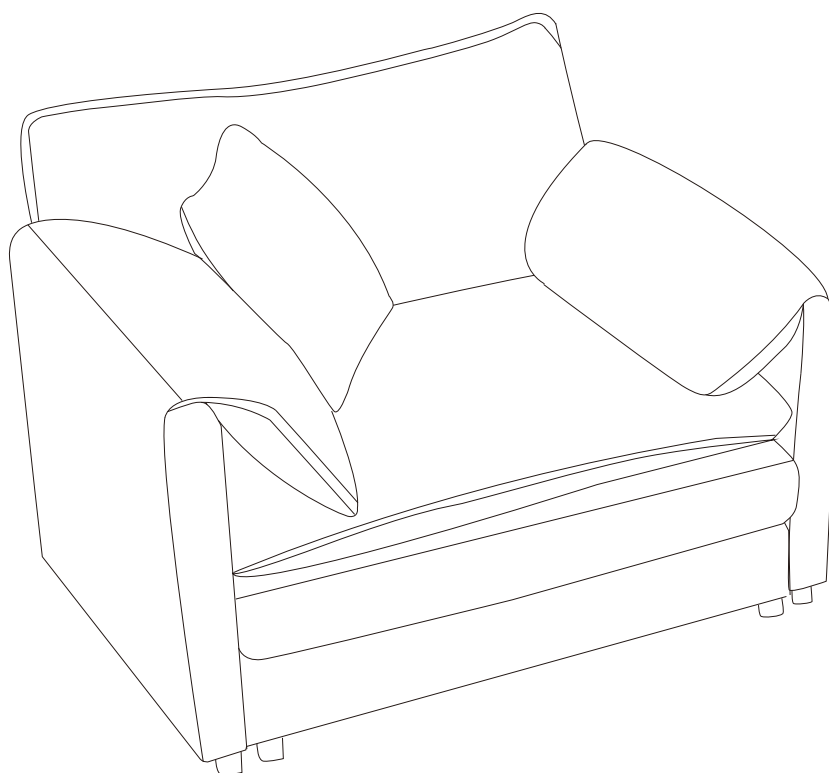


# Safety and Care Advice

## Important – Please read these instructions fully before starting assembly


Thanks for your purchase. Before assembling, please follow the instructions to check if all the spare parts and screws are intact.

- Considering the size and weight of the sofa, we recommend two adults to assemble the sofa, on a carpeted or padded area, in the room that it is intended for. Approximate assembly time: 30 minutes.
- Please do not throw away any of the packaging or the instruction until you have checked all the components and hardware and the furniture is fully assembled. Please ensure that the packaging is disposed in a safe and environmentally friendly way.
- Keep all components and packaging out of reach of children or animals to avoid the risk of choking or suffocation.
- Please do not take off the cover, and do not wash.

Your cushions come vacuum packed and sealed for shipping. To restore the cushion's original shape, follow the steps below.




Open the vacuum bag carefully.



Press and tap with both hands from the side to fully inhale air.















Press and tap with both hands from the front to fully inflate.



Carefully smooth out each section until the surface is even.

After packing up, place them in somewhere dry and ventilated. After about 72-96 hours. It can be restored to the best use condition.


## Components List
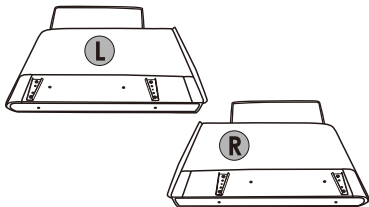
<b>A</b> armrests  X2	<b>B</b> seat frame  X1	<b>C</b> pillow  X1
<b>D</b> seat cushion  X1	<b>E</b> back cushion  X1	<b>F</b> back frame  X1
<b>G</b> screws  M8*35MM X4	<b>H</b> armrest pillow  X2	<b>I</b> screws  M8*45MM X8
<b>J</b> chair legs  X8	<b>K</b> allen wrench  X1	<b>M</b> pads  X12

## Assembly Instructions


### STEP 1

Screw chair legs J into the hole at the bottom of armrest A

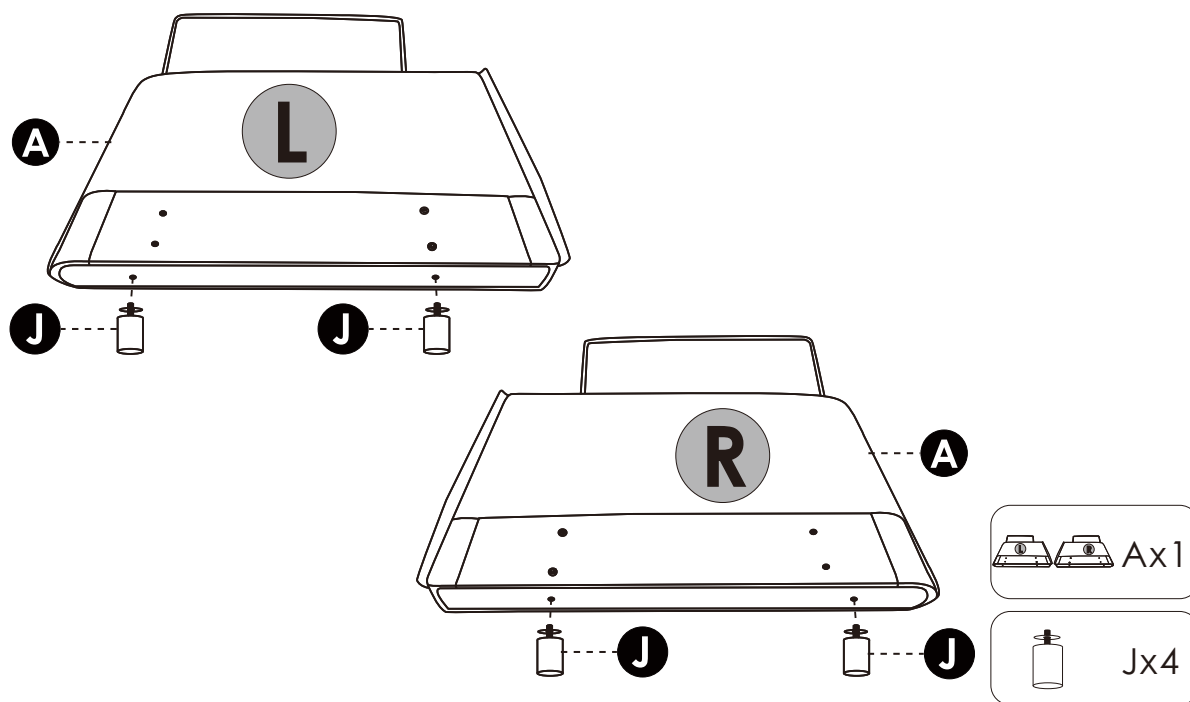


### STEP 2

Turn the seat frame sideways, and screw chair legs J to the hole at the bottom.

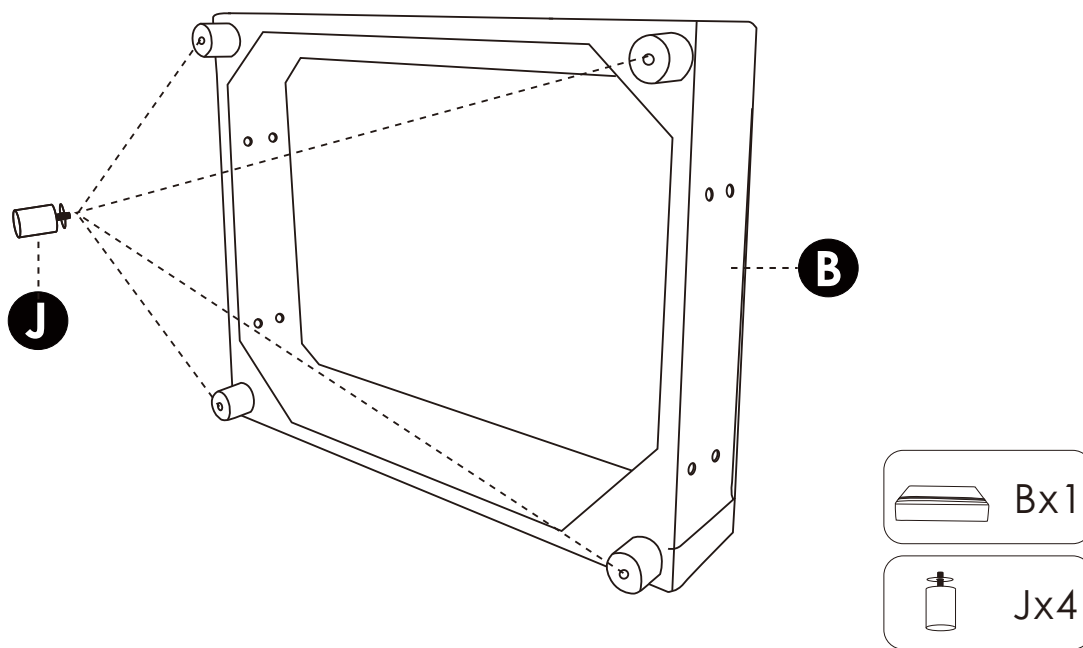

### STEP 3

Align the back frame with seat frame and tighten them with screws

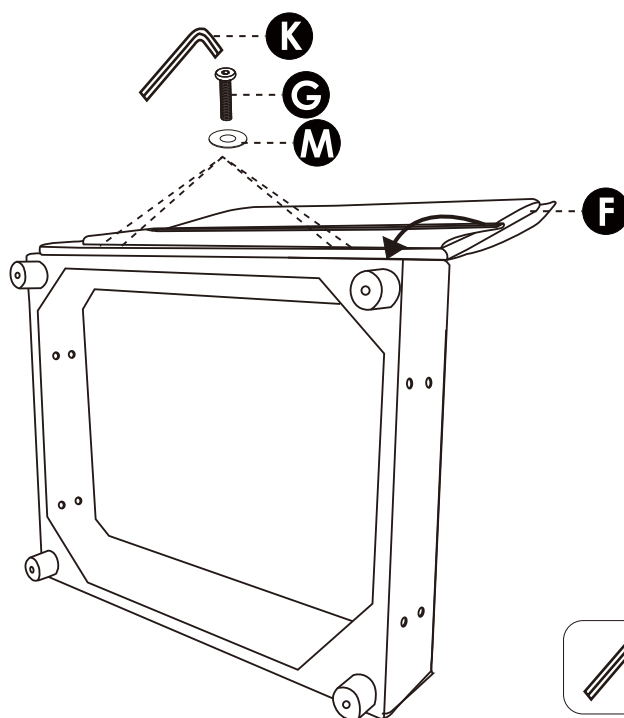

Mx4


Fx1



Gx4

### STEP 4

Attach the seat frame to armrests with pads and screws.

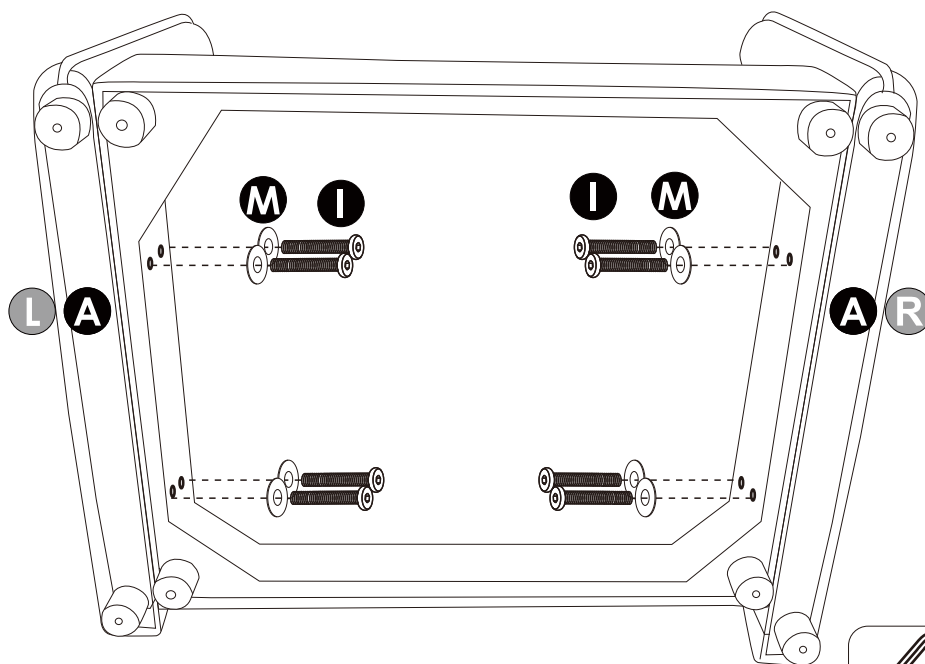

I



Mx4



Ix4




## STEP 5

Put the seat cushion D, back cushion E and pillow C in order then make them flat.

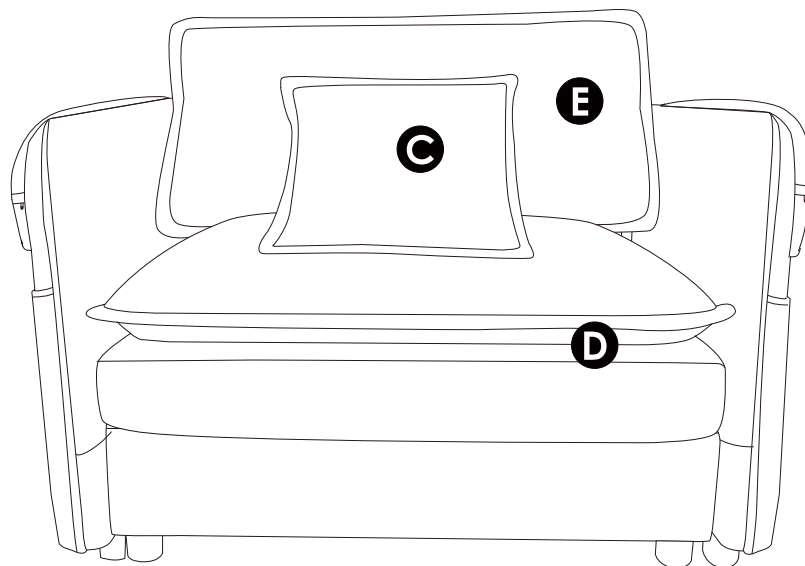


## STEP 6

Unzip the armrest bag, stuff it with pillow H and make it flat.

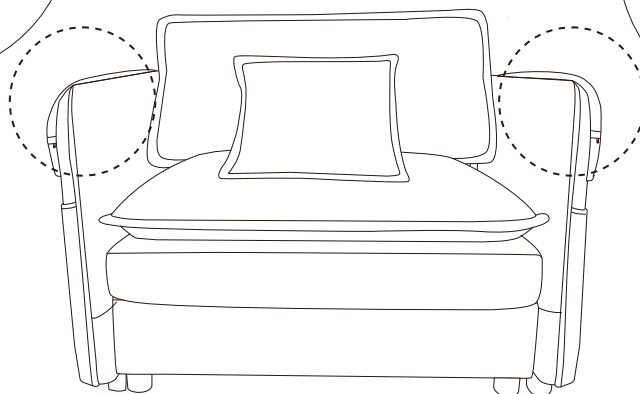

## STEP 7

Turn the armrest bag inside the chair, make it flat, and the installation is complete.

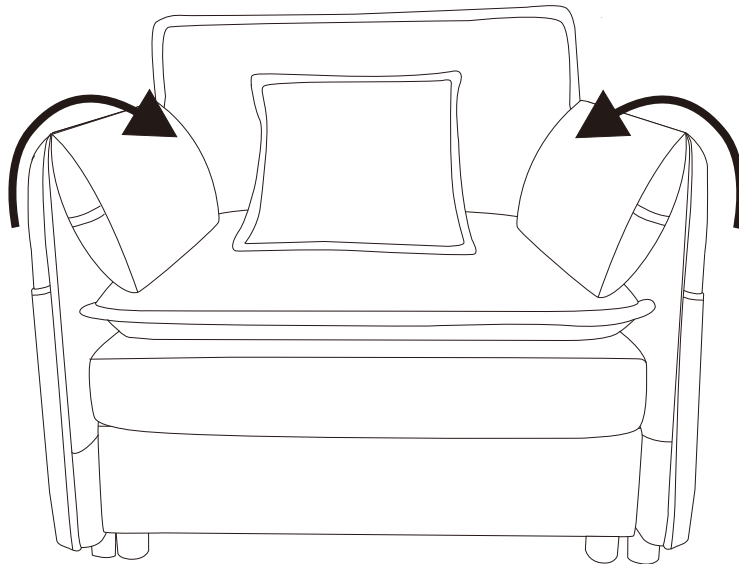

Installation completed

