
Assembly Instructions


Caution: You should read this before proceeding.

Care & Maintenance



- Prolonged exposure to rain may cause rusting which can stain floors.
- Do not put hot items directly on furniture surface.
- Do not clean furniture with harsh cleansers or polish.





Do not write on furniture without a padded barrier to protect the surface.





 To obtain the longest lifespan of your outdoor products, avoid extended and lengthy exposure to rain, snow, and direct sunshine. Whenever possible cover the product and /or place under patio or awnings.




· Not for commercial use. For residential use only.







Chair



Parts List				
Label	Picture	Description	QTY	
Α		Left Armrest	1	
В		Right Armrest	1	
С		Backrest	1	
D		Seat	1	
E		Support Bar	1	
F		Back Cushion	1	
G		Seat Cushion	1	

<u>Hardware</u>					
Label	Picture	Description	QTY		
1		Washer(M6/16)	13		
2		Washer(M6/12)	3		
3		Bolt (M6*15mm)	5		
4		Bolt (M6*30mm)	5		
5		Bolt (M6*45mm)	5		
6		Bolt (M6*65mm)	3		
7		Nut (M6)	3		
8	5	Spanner	1		
9		Allen Wrench	1		
Assembly Preparation					
Before Beginning Assembly:	A B F G	C D	E		
	1	6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	■ X3X3→ X1		



Read instructions, cover to cover-



Have 2 adults on hand for assembly-



Do not assemble on flooring or carpet-




Assemble on a clean non-marring surface (packing foam)-




Save all packaging until finished-

Assembly Steps

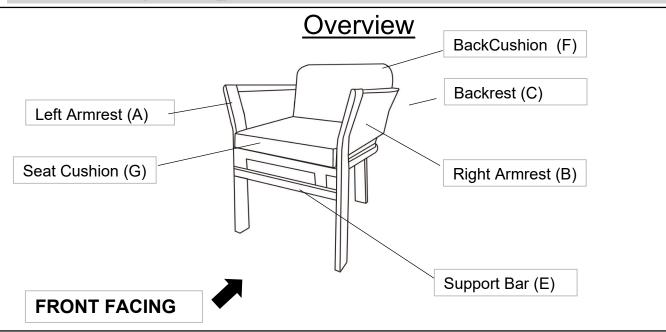

This Chair has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the Chair parts, the above picture is provided to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.


Step 1

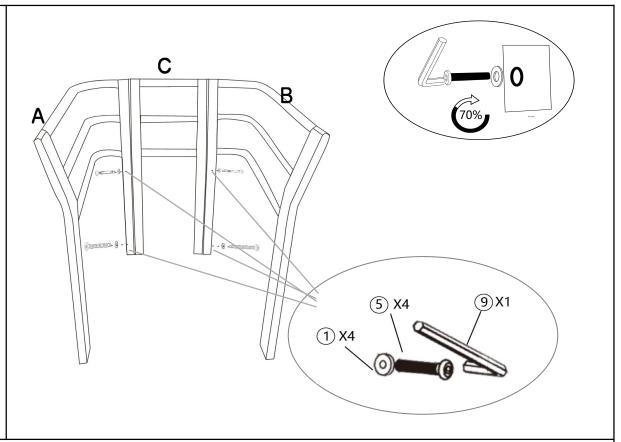

Open the carton and place all the parts onto a clean, non-marring surface. Attach the Left armrest (A) and Right armrest (B) to the Backrest(C) with Washers(1) and Bolts(5) using the Allen wrench(9) as shown above.

Do not fully tighten any Bolts at this time, you will lock them tightly at the end.


Step 2

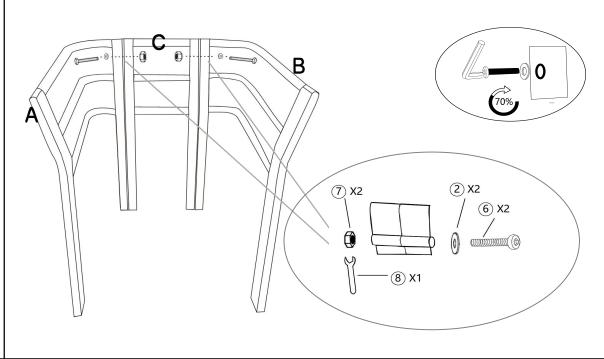

Attach the Left armrest (A) and Right armrest (B) to the Backrest(C) with Washers (②),nuts (⑦) and Bolts(⑥) using the Spaner (⑧) as shown above.

Do not fully tighten any Bolts at this time, you will lock them tightly at the end.


Step 3

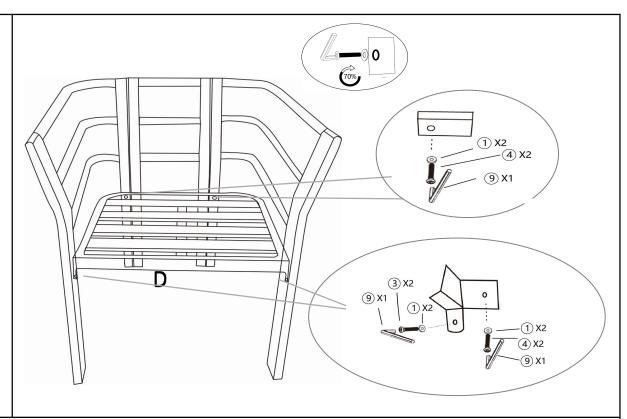

Attach the seat (D) to the Left armrest (A) and Right armrest (B) with Washers(1) Bolt (4)) using the Allen Wrench (9) as shown above. Attach the seat (D) to the Left armrest (A) and Right armrest (B) with Washers(1), Bolt (3)) using the Allen Wrench (9)

Do not fully tighten any Bolts at this time, you will lock them tightly at the end.


Step 4

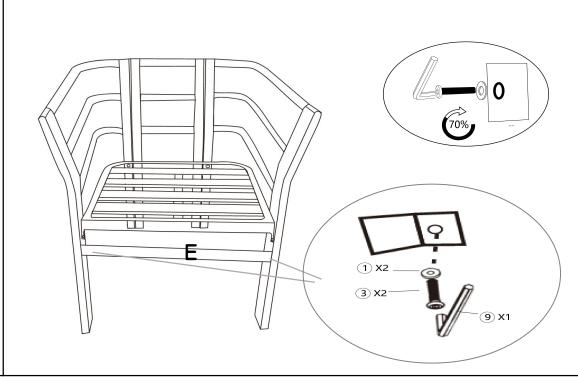

Attach the Support Bar (E) to Left armrest (A) and Right armrest (B) with Washers (1), and Bolts(3) using the Allen wrench (9) as shown above.


Do not fully tighten any Bolts at this time, you will lock them tightly at the end.



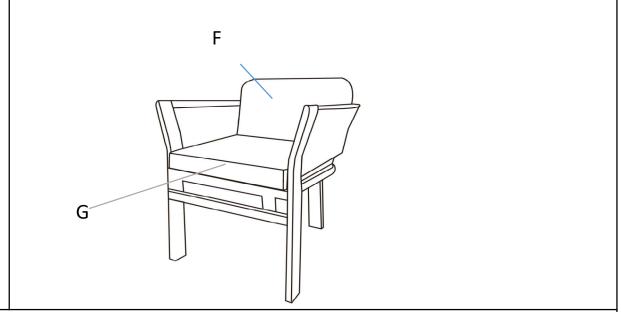

Put the Back cushion (F) and Seat cushion (G) on the Chair



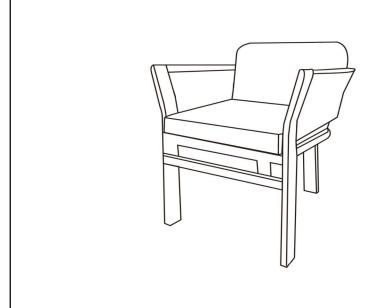

Stand the Chair up.

Place the Chair on a LEVEL SURFACE.

Inspect it and make sure the parts are adequately connected.

Gently and carefully, sit on the Chair.

This will help align all parts at all joints.

Then get off the Chair, and in a sequential manner, proceed to tighten all Bolts.

When tightening the Bolts, tighten sequentially.

DO NOT tighten any Bolt fully and then move on to the next one. This may cause the frame to warp. If the chair wobbles after tightening, loosen the Bolts and execute the same process.

If the Chair is not stable it could lead to damage of the product.

Your Chair is ready for use.

This Chair can only be used on a flat and level surface.